

RL5182

ASSEMBLY & INSTALLATION GUIDE

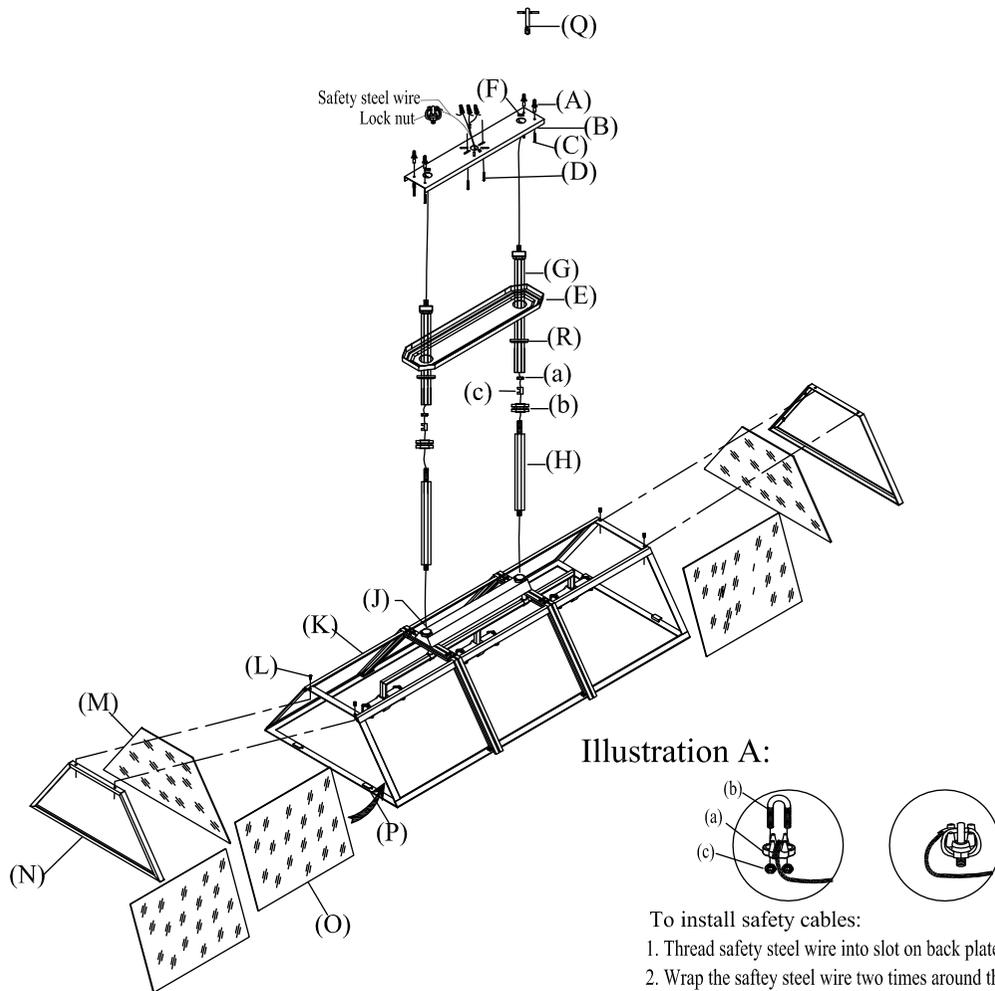


Illustration A:

To install safety cables:

1. Thread safety steel wire into slot on back plate (A).
2. Wrap the safety steel wire two times around the slot of the lock nut (a).
Note: Length of safety steel wire must be shorter than fixture wires (White/black/green wires).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully remove all parts from the carton.
2. Remove both side frames (N) from lantern box (K) by unscrewing screws (L).
3. Slide the glass panels (O) to the lantern box (K).
4. Carefully insert two glass panels (M) provided to lantern box (K), make sure metal tabs (P) are flipped against the openings of the lantern box (K). Place glass panels to the frame of lantern box (K), secure the glass panels by bending back the metal tabs (P) towards the openings of lantern box.
5. Replace metal frames (N) to lantern box (K) and secure with screws (L).
6. Join pole (G) and (H) together, letting the top nipple of pole (H) pass through (c), (b) and (a) and secure until taut.
7. Thread the bottom nipples of lamp poles (H) to the openings of rods (J).
8. Unscrew canopy rings (R), slide canopy rings (R) and canopy (E) on lamp poles (G).
9. Place mounting plate (B) on the wall, use it as a template, mark center points for four mounting holes on the wall. Remove mounting plates (B).
10. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
11. Place mounting plate (B) to lamp poles (G), make sure the top nipple of lamp pole (G) pass through the holes of mounting plate (B) and secure with nuts (F). Tighten with T-wrench (Q) provided.
12. Affix mounting plate (B) with light fixture to the ceiling by aligning holes and secure by inserting mounting screws (D) to the holes of outlet box and screws (C) to the plastic anchors (A) in the ceiling.
13. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
14. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
15. Connect all three neutral wires from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed.
16. Connect all three hot wires from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
17. Attach canopy (E) to the affixed mounting plate (B), secure with canopy ring (R).
18. Insert light bulbs into the sockets.
19. Restore power and test fixture.

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.