


## ASSEMBLY INSTRUCTIONS

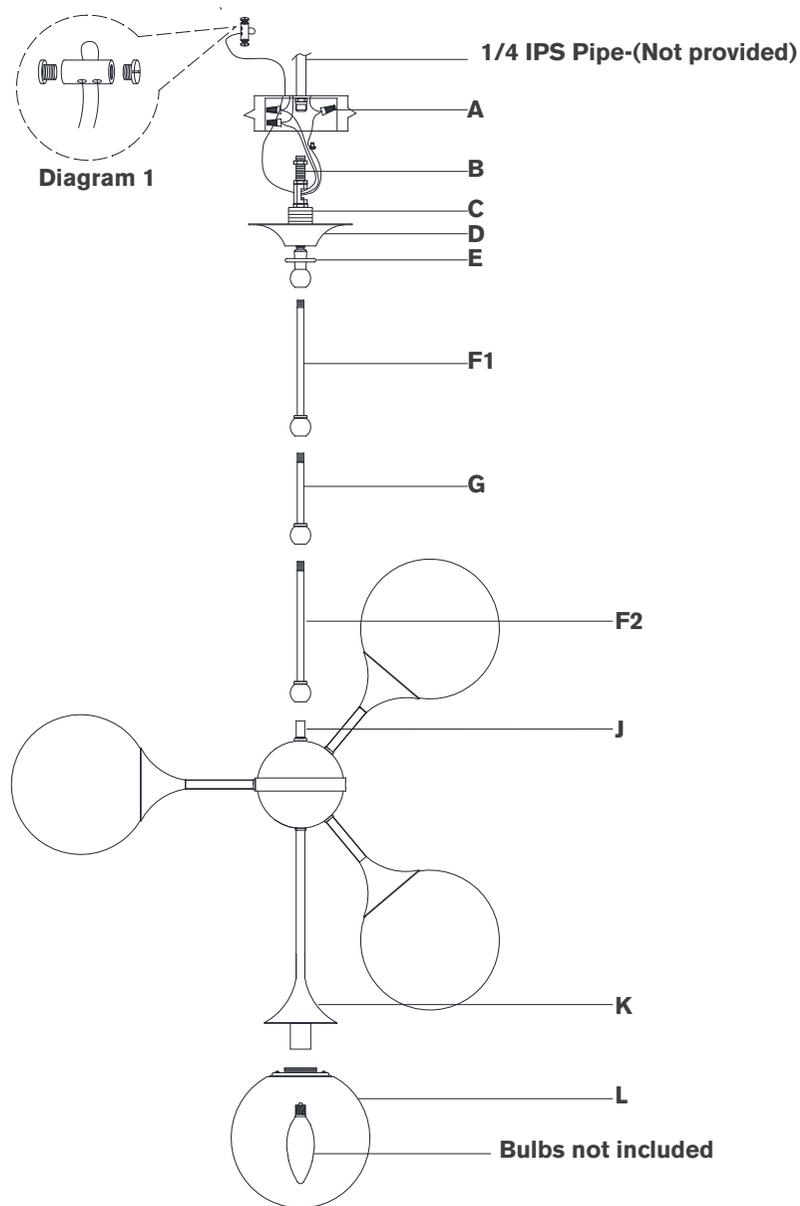

## Cristol Large Tiered Chandelier

Item # ARN 5402

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Chain Pliers
Slip Joint Pliers	Wire Strippers	Measuring Tape
Wire Cutters		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building (not included). Then install threaded nipple (B) into receiver and tighten with wrench.  
**NOTE:** Item must be supported independent of the junction box due to hanging weight.
- Feed electrical, ground wires and safety cable through bottom rods (F2), (G) and (F1), connect together then connect to fixture (J).
- Continue feeding wires through collar ring (E), canopy (D) and collar loop (C).
- Holding fixture upright, slide collar ring (E) and canopy (D) down and rest on fixture (J). Then connect collar loop (C) to top rod (F1).  
**NOTE:** Slide components down slowly to avoid damages.
- Install entire fixture by thread collar loop (C) to hicky under threaded nipple (B).
- Cut excess wires, being sure to leave enough to reach the junction box.
- Separate two sides of molded wire, and strip insulation on each 5/8".
- Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut (A).

**NOTE:** It is imperative that the fixture is grounded.

