

ASSEMBLY INSTRUCTIONS

Melange Large Floating Disc Chandelier

Item # KW 5602

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver

Slotted Screwdriver


Wire Cutters

Wire Strippers

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(G)** by loosening collar ring **(H)**.
3. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
4. Feed fixture wires through bottom rod **(I)** and connect to fixture body **(J)**.
5. Continue feeding fixture wires through collar ring **(H)**, canopy **(G)** and top rod **(F)**.
6. Holding fixture upright, slide collar ring **(H)** and canopy **(G)** down bottom rod **(I)** and rest on fixture body **(J)**. Then connect top rod **(F)** to bottom rod **(I)**.

NOTE: Slide components down slowly to avoid damages.

7. Hang fixture swivel ball to the center of mounting plate **(B)** and secure with screws **(E)** using provided wrench.
7. Cut excess wires, being sure to leave enough to reach the junction box.
8. Separate two sides of molded wire and strip insulation on each 5/8".
9. Connect fixture neutral wire (black) to the driver output neutral wire (black) using wire nut **(A)**.

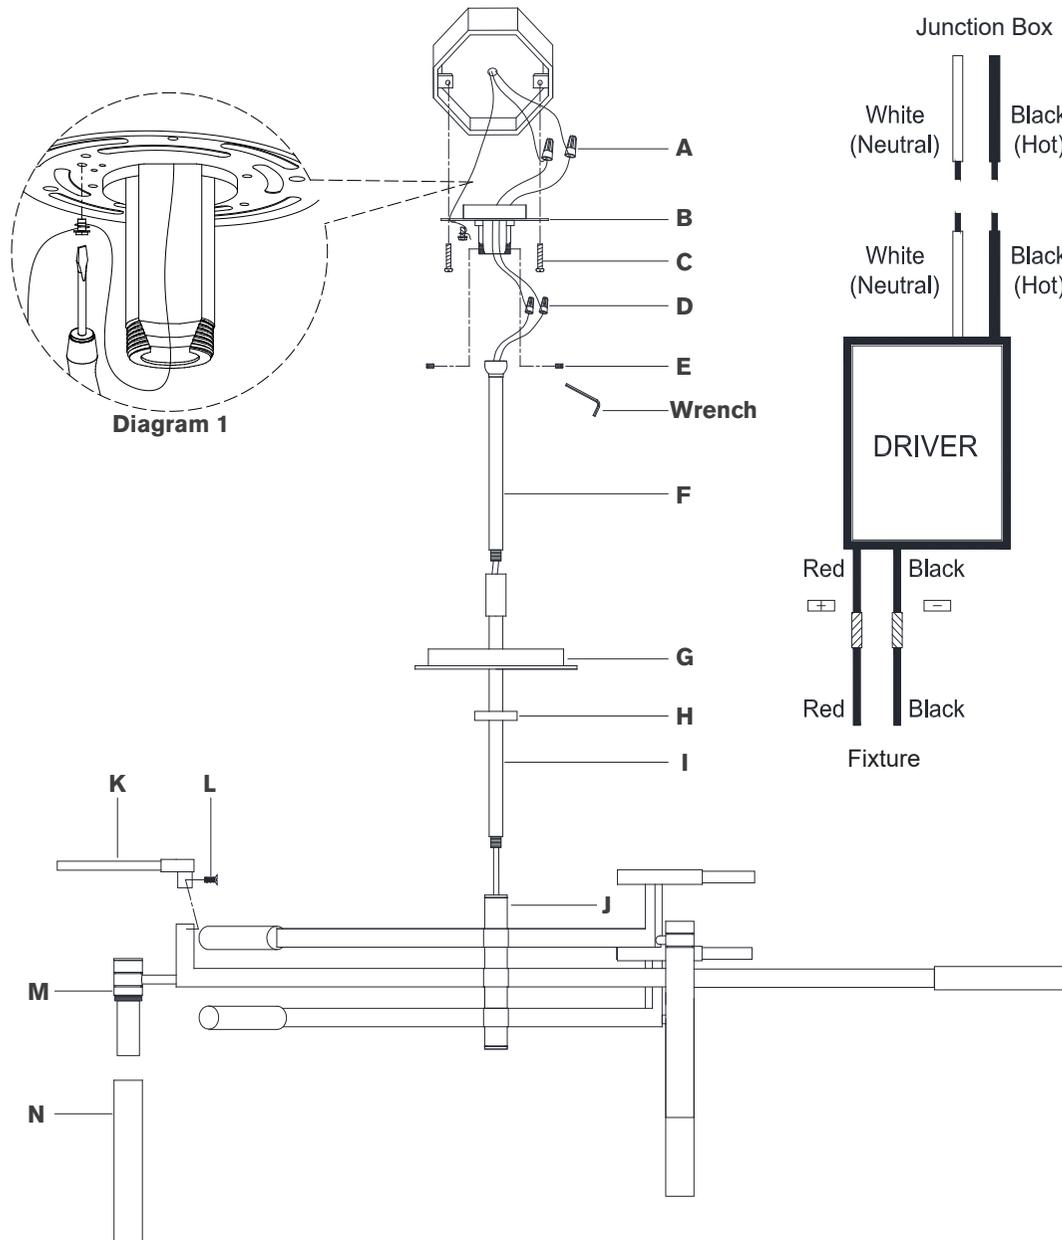

VISUAL COMFORT



ASSEMBLY INSTRUCTIONS

Melange Large Floating Disc Chandelier

Item # KW 5602

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Connect fixture hot wire (red) to the driver output hot wire (red) using wire nut **(A)**.
11. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.

NOTE: It is imperative that the fixture is grounded.
12. Connect driver input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
13. Connect driver input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.
14. Make sure all wire connections are tight and tuck into the junction box.
15. Install canopy **(G)** to the junction box and secure with collar ring **(H)**.
16. Attach disk **(K)** to the bottom of fixture **(J)** and secure with screws **(L)**.
17. Thread tube **(N)** to socket **(M)**.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.

