


## ASSEMBLY INSTRUCTIONS

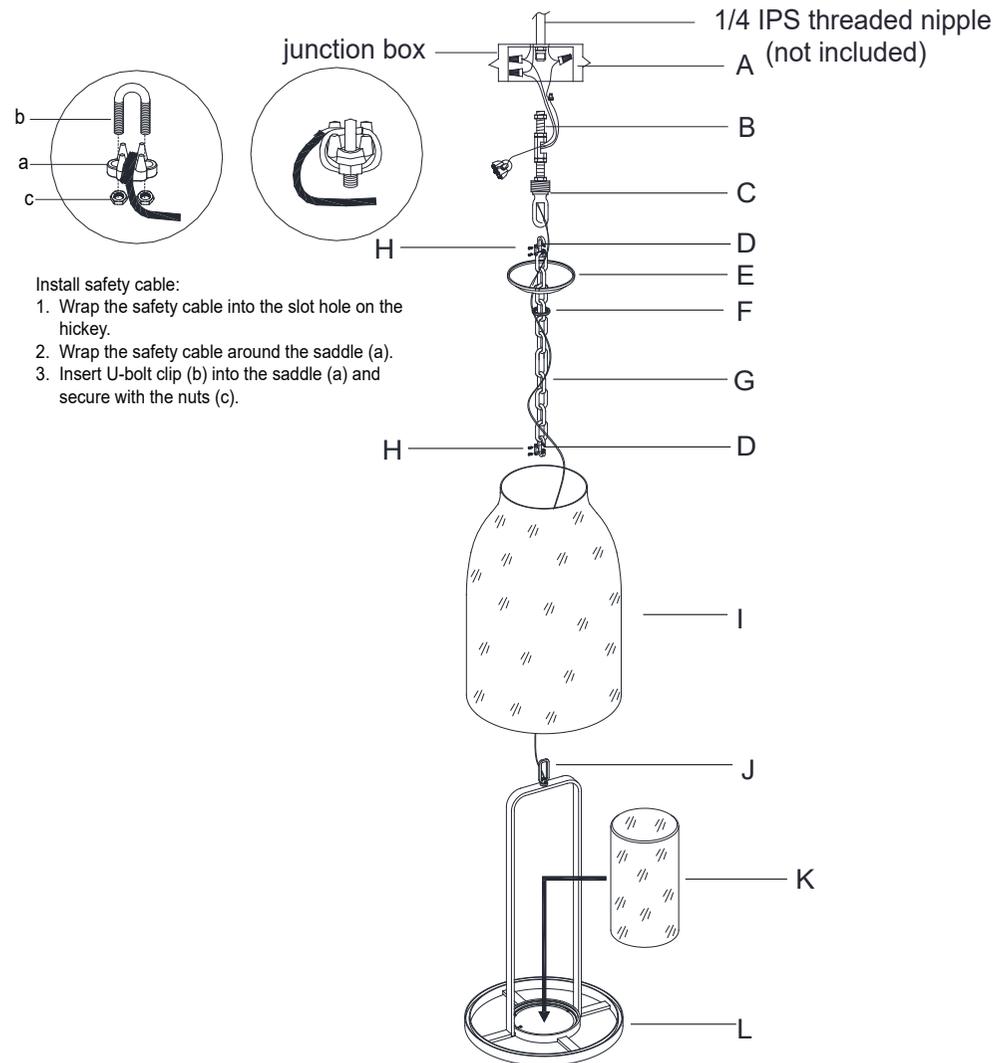

## Ollie Large Lantern

Item # RL 5811

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Carefully remove all parts from the carton.
2. Remove the collar loop (C) from the chain (G) by unscrewing the set screws (H) on the quick link (D).
3. A 1/4 IPS pipe must be installed through the junction box and secured to a structural member of the building. This item must hang independently of the junction box. Then install the threaded nipple (B) into the 1/4 IPS PIPE.
4. Install the canopy (E) to collar loop (C) and secure with collar ring (F). If needed, adjust canopy (E) height by loosening hex nuts and screwing collar loop (C) up or down then re-secure.
5. Carefully thread the glass (K) to the shade holder (L), then place the glass shade (I) onto the shade holder (L).
6. With the fixture dimension as a guide, shorten the chain (G) as needed using the chain pliers (not included).
7. Open one chain quick link (D), then attach the chain quick link (D) to the collar loop (C).  
Secure the chain quick link (D) with the set screws (H).
8. Open the chain quick link (D) from the opposite side then attach to the hanging loop (J).  
Secure the chain quick link (D) with the set screws (H).
9. Weave the fixture wires through the chain (G).
10. When you reach the canopy (E) and collar loop (C), measure the wires then cut, be certain to leave enough length to connect the wires in the junction box.
11. Strip the insulation on the fixture wires about 5/8".

# RALPH LAUREN



