


ASSEMBLY INSTRUCTIONS

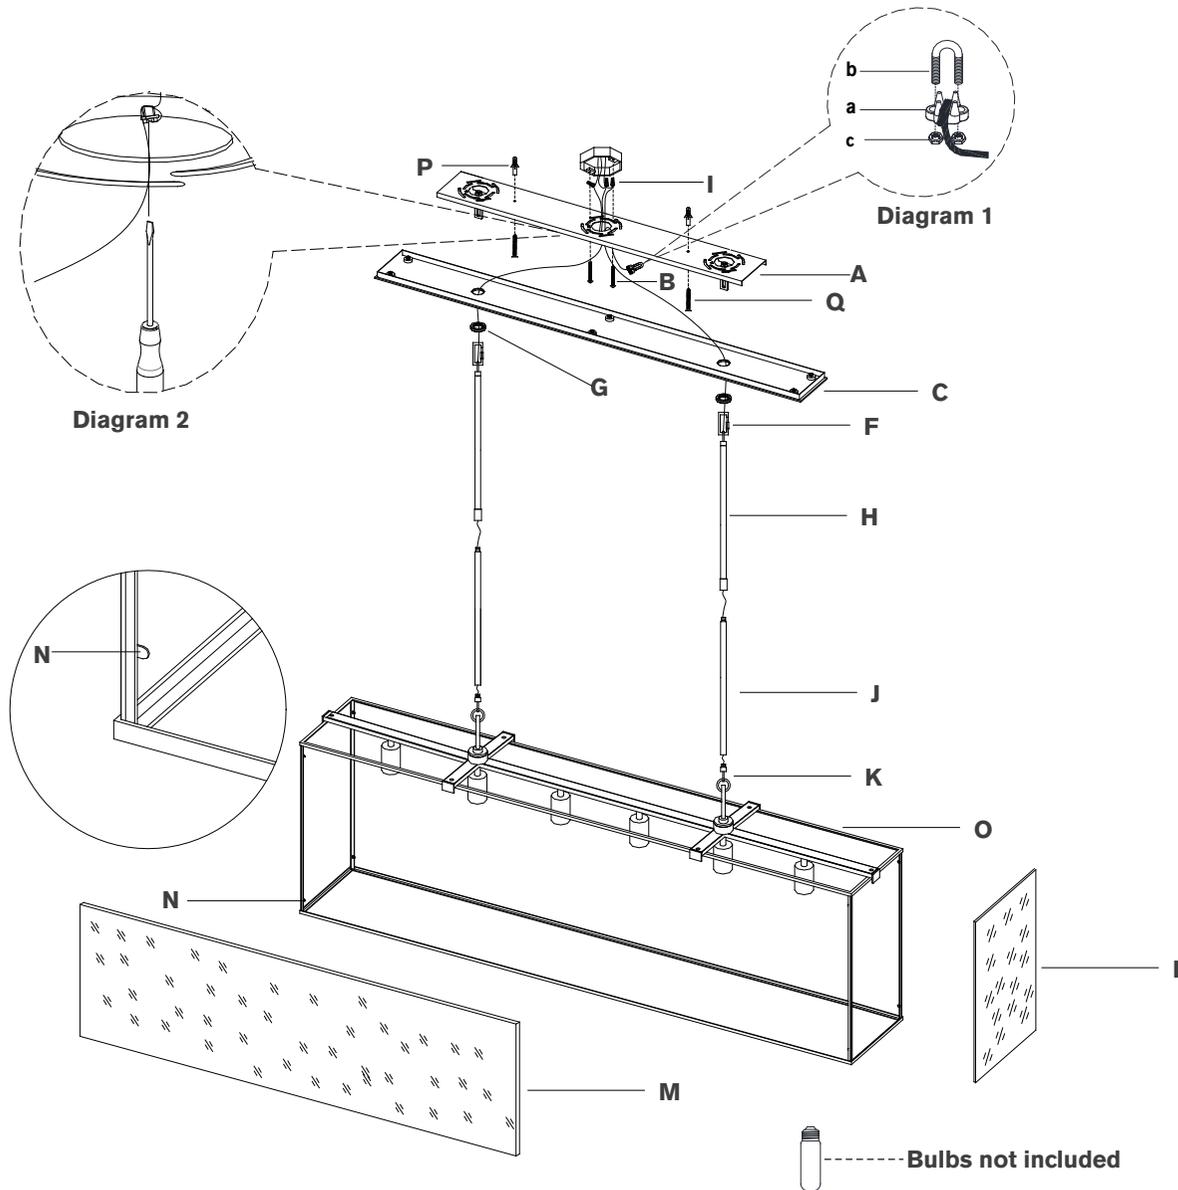

Belden Linear Lantern

Item # S 5015

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Wire Cutters	Hammer	Pencil
Drill		

PERSONS REQUIRED: Two

- Carefully remove all parts from the box. Place on a clean, soft surface.
- Remove mounting plate **(A)** from canopy **(C)** by removing collar ring **(G)**.
- Using the mounting plate **(A)** as a guide, line up with the junction box and mark anchor positions.
- Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(P)** into the holes using hammer.
- Install mounting plate **(A)** to junction box and secure with mounting screws **(B)**, then secure wood screws **(Q)** to anchors **(P)**.
- Install canopy **(C)** to mounting plate **(A)** and secure with collar ring **(G)**.
- Install light bulbs into the sockets.
- Install glass panels **(L & M)** to lantern **(O)** and secure by bending metal tabs **(N)**.
- NOTE:** It is recommended to have a helper assist in supporting the fixture for step 9~11.
- Feed fixture wire, ground wire and safety cable through bottom rods **(J)** and top rods **(H)**.
- Connect bottom rods **(J)** to top rods **(H)**, then thread to loops **(K)**.

ASSEMBLY INSTRUCTIONS

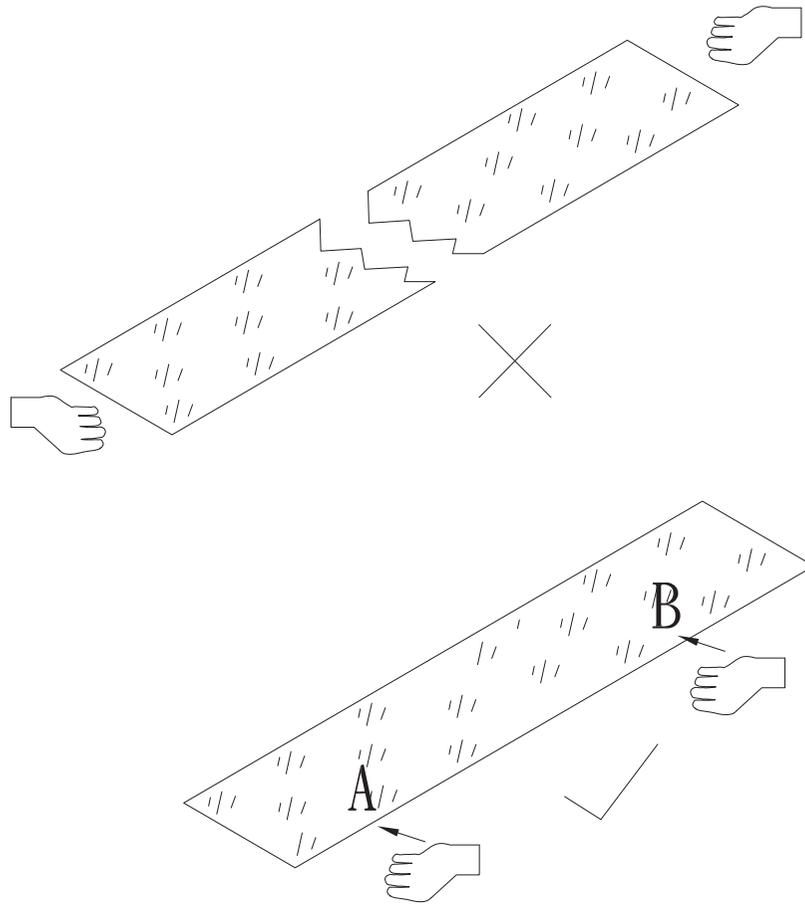

Belden Linear Lantern

Item # S 5015

NOTICE:

Please follow instructions below to avoid damages caused by improper removal.

1. Carefully remove glass panel from the box while properly supporting weight by placing hands in positions **(A)** and **(B)** as shown in diagram. Place on a clean, soft surface.