

Visual Comfort & Co.





TABLE OF CONTENTS

Visual Reference Guide	۷
Our Designers	17
Modern	19
Transitional	119
Traditional	16
Outdoor	185
Accessories	207
Resources	23
Index	242

Icons

ENT ENERGY STAR QUALIFIED

Meets strict energy efficiency guidelines set by the EPA and Department of Energy

LED LED

LED light kit included

DAMP DAMP RATED

Safety rated DAMP for covered outdoor applications

WET WET RATED

Safety rated WET for exposed outdoor applications

DC DC MOTOR

DC Motor generates more power than AC motors with an average of 70% energy savings

REV REVERSIBLE BLADES

Each side of the blade features a different finish

SMART SMART

Control via transmitter, phone, tablet, wifi

COASTAL


Engineered to withstand harsh environmental conditions and backed by a 5-year finish warranty



USING THIS CATALOG

Here are some helpful tips and things to think about when looking for the perfect fan. This catalog is organized by style, making it easy to browse collections within an aesthetic group. The grid below breaks down the code to our product numbering system.

Unique Product Identifier

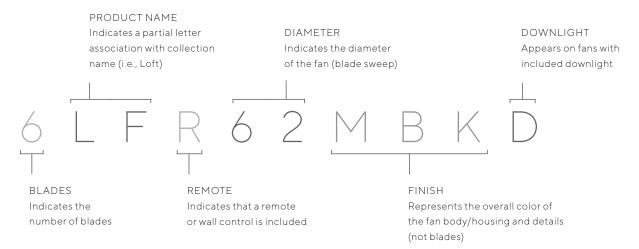

Energy Efficiency

Monte Carlo fans create overall energy cost savings through efficient engineering and design. Everything from the motor to the shape of the fan blades contributes to moving more cubic feet of air per minute (CFM) while using less energy. The result? Every Monte Carlo fan consumes less energy than a 100-watt light bulb, even at the fan's highest setting.

Monte Carlo also offers select fans that provide even more energy efficiency and savings. Look for the DC Motor icon and Energy Star icon that designate these fans throughout this catalog.

DC MOTOR DC

The DC (direct current) motor generates more power and torque than regular motors while using 70% less energy and running with virtually no noise. DC technology also keeps the motor cool to extend the fan's life span while the motor's small size creates greater design flexibility.

ENERGY STAR ENX

Fans with the Energy Star rating meet the US EPA program performance standard for quality and performance. The energy savings from these fans will create significant savings on utility bills while also protecting the climate through reduced greenhouse gas emissions.

FTC Energy Guide

ELECTRICITY

Indicates how much electrical power a fan uses.

AIRFLOW

This represents airflow measured in cubic feet per minute. The airflow quantifies the amount of air a ceiling fan delivers.

ENERGY COST (PER YEAR)

Estimated annual energy cost based on \$0.12 per KWH and 6.4 hours of use per day.

EFFICIENCY

Measures the airflow efficiency by dividing the CFM a fan produces by the watts of energy it consumes.

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	288 CFM/Watt	269 CFM/Watt

VISUAL INDEX



LED DAMP

pg. 108

LED WET

pg. 190

EN★ LED DC

pg. 92

VISUAL INDEX



















DOVER 60
EN* DC
pg. 144

ERA 52 LED DAMP pg. 86

ERA 44 LED DAMP pg. 88



GIARRE 60

EN* DC

pg. 162



HAVEN 52 DC LED

EN* DC LED

pg. 176



HAVEN 52 DC EN★ DC pg. 177



HAVEN 52 LED 3 pg. 180



HAVEN 52 LED 2 LED pg. 178



HAVEN 52 pg. 182



HAVEN OUTDOOR 52 LED

LED WET

pg. 200



HAVEN OUTDOOR 52

WET

pg. 202



HAVEN OUTDOOR 44

WET

pg. 204
















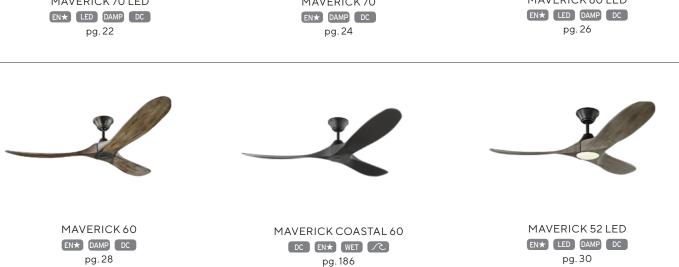

VISUAL INDEX







MAVERICK 52 EN★ DAMP DC pg. 32

METROGRAPH 56

EN* LED DC

pg. 140

MINIMALIST 72

EN* LED DAMP DC

pg. 36







MINIMALIST 56

EN* LED DAMP DC

pg. 38

PRAIRIE 72

EN* LED DAMP DC

pg. 120

PRAIRIE 62

EN* LED DAMP DC

pg. 122







PRAIRIE 52

EN★ LED DAMP DC

pg. 124

ROZZEN 52

DC EN*

pg. 68

ROZZEN 44
EN* DC
pg. 70







RUHLMANN 52 SMART

(LED DAMP DC SMART)

pg. 134

STOCKTON 60
EN* LED DAMP DC
pg. 40

STREAMING 60 SMART

LED DAMP DC SMART

pg. 110







DISCUS SMART 52 LED

Brushed Steel Housing with Silver / American Walnut Blades and Matte Opal Glass



SMART FANS KEY FEATURES

- Hand-held transmitter included that can be used without wifi connection.
- Connect your Smart fan to WiFi to get additional features: Scheduling, Dusk to Dawn, Natural Breeze.
- Control your fan via your smart home system or via mobile phone using the Bond Home App.
- Download the Bond Home skill for Alexa or Bond Home Action for Google Home and use your voice to control your ceiling fan.
- Additional integration available with SmartThings, Control4, ELAN, Hubitat, and others.

SMART FANS







UTDOOR



AVILA COASTAL 54 LED WET pg. 190



BOYNTON 54 LED WET pg. 196



COLLINS COASTAL 60 SMART DC WET SMART pg. 188



CRUISE 52 WET pg. 198



CYCLONE 60 WET pg. 192



DISCUS OUTDOOR 52 LED WET pg. 194



HAVEN OUTDOOR 52 LED LED WET pg. 200



HAVEN OUTDOOR 52 WET pg. 202



HAVEN OUTDOOR 44 WET pg. 204



MAVERICK COASTAL 60 DC EN* WET









OUR DESIGNERS





Renowned designer Barbara Barry is known for her refined and streamlined style. Her iconic pieces span the panorama of home furnishings and are founded in elegance of form and simplicity of line.

As with her interiors, Barry's signature designs reflect her belief that in paring down a design to its essence, the tenet of simplicity, allows it to live in harmony with its surroundings and achieve a certain timelessness.



SEAN LAVIN

Sean Lavin is the Chief Design Officer for Visual Comfort & Co. He works closely with our design partners to bring their concepts to life and has personally designed many of Monte Carlo's well-known signature designs since 2014. Sean's designs draw influence from his travels throughout the world.

STREAMING 60 SMART STREAMING 52 SMART pg. 110 pg. 112 ADLER 60 pg. 64 AKOVA 56 pg. 96 ARCADE 68, 54 pg. 98 AREZZO 60 pg.164 ARMSTRONG 60 pg. 66 ASPEN 70, 56 pg. 126 AVVO 56 pg. 90 BOYNTON 54 pg. 196 CIRQUE 56 pg. 62 pg. 58 CLARITY 56, 52, 42 COLLINS 60 SMART pg.34 COLLINS COASTAL 60 SMART pg.188 GIARRE 60 pg.162 LOFT 96, 72, 62 pg. 42 MINIMALIST 72, 56 pg.36 VISION 72, 56, 52, 42 pg. 50



CHAPMAN & MYERS

A contemporary collaboration, Chapman & Myers combines the best of E.F. Chapman's classically influenced style with Kyle Myers' modern sensibilities. Chapman has produced signature lighting designs for Visual Comfort since 1996, while Myers brings a fresh perspective from his recent tenure at Ralph Lauren Home. Their designs are influenced by architectural themes and present a timeless, refined quality that suits any interior.

ATLANTIC 56	pg. 92
BRYDEN 60 SMART	pg. 132
LAUNCETON 56	pg. 56
RUHLMANN 52 SMART	pg. 134
SUBWAY 56	pg. 136



THOMAS O'BRIEN

Designer, collector, and merchant Thomas O'Brien creates casual homes and elegant interiors, from the city to the country. In his New York store, Aero, and through his extensive product designs, his iconic blend of traditional and modern elements makes a collected and classic style feel easy. Thomas' designs with Monte Carlo carry this balance in a warm, livable mix for every home.

ALBA 60	pg. 48
HICKS 60	pg. 130
METROGRAPH 56	pg. 140



MODERN

Adler 60	64	Lily 56	114
Akova 56	96	Loft 96	42
Alba 60	48	Loft 72	44
Arcade 68	98	Loft 62	46
Arcade 54	100	Lowden 60 Smart	104
Armstrong 60	66	Lowden 52	106
Atlantic 56	92	Maverick 88	20
Avila 54	108	Maverick 70	24
Avvo 56	90	Maverick 70 LED	22
Butterfly 54	116	Maverick 60	28
Cirque 56	62	Maverick 60 LED	26
Clarity 56	58	Maverick 52	32
Clarity 52	60	Maverick 52 LED	30
Clarity 42	61	Minimalist 72	36
Collins 60 Smart	34	Minimalist 56	38
Destin 57	94	Rozzen 52	68
Era 52	86	Rozzen 44	70
Era 44	88	Stockton 60	40
Jovie 58	74	Streaming 60 Smart	110
Jovie 58 LED	72	Streaming 52 Smart	112
Jovie 52	78	Syrus 52	84
Jovie 52 LED	76	Vision 72	50
Jovie 44	82	Vision 56	52
Jovie 44 LED	80	Vision 52	54
Kingston 72	102	Vision 42	56

MAVERICK 88



Matte Black Housing
Dark Walnut Hand Carved Wood Blades



3MAVR88BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR88BS Brushed Steel Housing

Dark Walnut Hand Carved Wood Blades



3MAVR88AGP Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR88BSKOA Brushed Steel Housing Koa Hand Carved Wood Blades



3MAVR88RZW Matte White Housing Matte White Hand Carved Wood Blades

MAVERICK 88







BLADES

(3) Blades (Included) Variable Blade Pitch 88" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9"

B. Blade Drop: 13.7"

C. Housing Width: 8.5"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE*
ELECTRICITY	26 Watts	15 Watts
AIRFLOW	14784 CFM	10168 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	575 CFM/Watt	668 CFM/Watt



Customize your look with Maverick Super Max Finish Kits (pg. 224) Shown: Finish Kit 88MCFK-BK

MAVERICK 70 LED



3MAVR70BKBKD

Matte Black Housing Matte Black Hand Carved Wood Blades Opal Etched Glass



3MAVR70BKD

Matte Black Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR70AGPD

Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades Opal Etched Glass



3MAVR70BSD

Brushed Steel Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR70BSKOAD

Brushed Steel Housing Koa Hand Carved Wood Blades Opal Etched Glass



3MAVR70RZWD

Matte White Housing Matte White Hand Carved Wood Blades Opal Etched Glass

MAVERICK 70 LED









BLADES

(3) Blades (Included) Variable Blade Pitch 70" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated Downlight: 18W Light Output: 1100 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 13.8"
- B. Blade Drop: 12.8"
- C. Housing Width: 6.8"
- D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	18 Watts
AIRFLOW	7336 CFM	5943 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	331CFM/Watt	337 CFM/Watt



Customize your look with Maverick LED Finish Kits (pg. 225) Shown: Finish Kit MCFKLED-BBS

MAVERICK 70



3MAVR70BS

Brushed Steel Housing
Dark Walnut Hand Carved Wood Blades



3MAVR70BKBK

Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR70RZWBBS

Burnished Brass Housing Matte White Hand Carved Wood Blades



3MAVR70BK

Matte Black Housing Dark Walnut Hand Carved Wood Blades



3MAVR70AGP

Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR70BSKOA

Brushed Steel Housing Koa Hand Carved Wood Blades



3MAVR70RZW

Matte White Housing Matte White Hand Carved Wood Blades

MAVERICK 70







(3) Blades (Included) Variable Blade Pitch 70" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"

B. Blade Drop: 11.6"

C. Housing Width: 7"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6821CFM	5192 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	229 CFM/Watt	250 CFM/Watt



Customize your look with

Maverick Finish Kits (pg. 224)

Shown: 3MAVR70BSKOA with Finish Kit MCFK-BK

MAVERICK 60 LED



Matte Black Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR60BKBKD

Matte Black Housing Matte Black Hand Carved Wood Blades Opal Etched Glass



3MAVR60AGPD

Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades Opal Etched Glass



3MAVR60BSD

Brushed Steel Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR60BSKOAD

Brushed Steel Housing Koa Hand Carved Wood Blades Opal Etched Glass



3MAVR60RZWD

Matte White Housing Matte White Hand Carved Wood Blades Opal Etched Glass

MAVERICK 60 LED









BLADES

(3) Blades (Included) Variable Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated LED: 18W Light Output: 1100 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.8"

B. Blade Drop: 12.8"

C. Housing Width: 6.8"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	20 Watts
AIRFLOW	7680 CFM	5365 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	269 CFM/Watt



Customize your look with Maverick LED Finish Kits (pg. 225) Shown: Finish Kit MCFKLED-BK

MAVERICK 60



3MAVR60BSKOABrushed Steel Housing
Koa Hand Carved Wood Blades



3MAVR60BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR6ORZWBBS
Burnished Brass Housing
Matte White Hand Carved Wood Blades



3MAVR60BK Matte Black Housing Dark Walnut Hand Carved Wood Blades



3MAVR60AGP Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR60BS Brushed Steel Housing Dark Walnut Hand Carved Wood Blades



3MAVR60RZW Matte White Housing Matte White Hand Carved Wood Blades

MAVERICK 60







BLADES

(3) Blades (Included) Variable Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"

B. Blade Drop: 11.6"

C. Housing Width: 7"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	20 Watts
AIRFLOW	6687 CFM	4551CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	245 CFM/Watt	231 CFM/Watt



Customize your look with Maverick Finish Kits (pg. 224)

Shown: 3MAVR60RZW with Finish Kit MCFK-BK

MAVERICK 52 LED



3MAVR52AGPD

Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades Opal Etched Glass



3MAVR52BKBKD

Matte Black Housing Matte Black Hand Carved Wood Blades Opal Etched Glass



3MAVR52BKD

Matte Black Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR52BSD

Brushed Steel Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MAVR52BSKOAD

Brushed Steel Housing Koa Carved Wood Blades Opal Etched Glass



3MAVR52RZWD

Matte White Housing Matte White Hand Carved Wood Blades Opal Etched Glass

MAVERICK 52 LED









BLADES

(3) Blades (Included) Variable Blade Pitch 52" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated Downlight: 18W Light Output: 1100 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.8"

B. Blade Drop: 12.8"

C. Housing Width: 6.8"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	21 Watts
AIRFLOW	6928 CFM	4707 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	230 CFM/Watt	229 CFM/Watt



Customize your look with Maverick LED Finish Kits (pg. 225) Shown: Finish Kit MCFKLED-BS

MAVERICK 52



3MAVR52RZW
Matte White Housing
Matte White Hand Carved Wood Blades



3MAVR52BKBK
Matte Black Housing
Matte Black Hand Carved Wood Blades



3MAVR52RZWBBS

Burnished Brass Housing

Matte White Hand Carved Wood Blades



3MAVR52BK

Matte Black Housing Dark Walnut Hand Carved Wood Blades



3MAVR52BS

Brushed Steel Housing Dark Walnut Hand Carved Wood Blades



3MAVR52AGP

Aged Pewter Housing Light Grey Weathered Oak Hand Carved Wood Blades



3MAVR52BSKOA

Brushed Steel Housing Koa Hand Carved Wood Blades

MAVERICK 52







BLADES

(3) Blades (Included) Variable Blade Pitch 52" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 11.7"

B. Blade Drop: 11.6"

C. Housing Width: 7"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 85mm x 28mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	5889 CFM	3807 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	217 CFM/Watt	208 CFM/Watt



Customize your look with

Maverick Finish Kits (pg. 224)

Shown: 3MAVR52BK with Finish Kit MCFK-BBS

COLLINS 60 SMART



3CLNSM60MBKMidnight Black Housing
Dark Walnut



3CLNSM60AGP Aged Pewter Housing Light Grey Weathered Oak



3CLNSM60BS Brushed Steel Housing Dark Walnut

COLLINS 60 SMART

SEAN LAVIN







BLADES

(3) Blades (Included) 18° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse










COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.5"
- B. Blade Drop: 14.3"
- C. Housing Width: 6.4"
- D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 30mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	22 Watts
AIRFLOW	6884 CFM	5063 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	246 CFM/Watt	234 CFM/Watt



3MNLR72AGPD-V1
Aged Pewter Housing
Light Grey Weathered Oak Hand Carved Wood Blades
Opal Etched Glass



3MNLR72BKD-V1 Black Steel Housing Dark Walnut Hand Carved Wood Blades Opal Etched Glass

MINIMALIST 72

SEAN LAVIN









BLADES

(3) Blades (Included) Variable Blade Pitch 72" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated LED: 16W

Light Output: 1100 Lumens Net

CCT: 2700K CRI: 90+

MCM360 Finishing Cap Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 6°

MCM95 Sloped Ceiling Kit Available

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kit MCM95 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 13.7"

B. Blade Drop: 12.9"

C. Housing Width: 5.4"

D. Downrod: 6" (additional lengths pg. 236) Maximum Size 48"

Motor Size: 85mm x 28mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	22 Watts
AIRFLOW	9468 CFM	6934 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	302 CFM/Watt	322 CFM/Watt











3MNLR56BKD-V1 Matte Black Housing

Dark Walnut Hand Carved Wood Blades Opal Etched Glass



3MNLR56AGPD-V1

Aged Pewter Housing $Light\ Grey\ Weathered\ Oak\ Hand\ Carved\ Wood\ Blades$ Opal Etched Glass

MINIMALIST 56

SEAN LAVIN









BLADES

(3) Blades (Included) Variable Blade Pitch 56" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

LAMPING

Integrated LED: 16W

Light Output: 1100 Lumens Net

CCT: 2700K CRI: 90+

MCM360 Finishing Cap Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 6°

MCM95 Sloped Ceiling Kit Available

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kit MCM95 (pg. 228)

FAN SPECIFICATIONS



A. Fixture Drop: 13.7"

B. Blade Drop: 12.9"

C. Housing Width: 5.4"

D. Downrod: 6" (additional lengths pg. 236) Maximum Size 48"

Motor Size: 85mm x 25mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	21 Watts
AIRFLOW	7240 CFM	5089 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	267 CFM/Watt	246 CFM/Watt





Shown with Finishing Cap



3STR60RZWD Matte White Housing Matte White Blades

Opal Etched Glass



3STR60AGPD Aged Pewter Housing Light Grey Weathered Oak Blades Opal Etched Glass

STOCKTON 60







BLADES

(3) Blades (Included) Variable Blade Pitch 60" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 25W Light Output: 1290 Lumens Net CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.1" B. Blade Drop: 12.2"

C. Housing Width: 10.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	32 Watts	21 Watts
AIRFLOW	7916 CFM	5685 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	246 CFM/Watt	271 CFM/Watt











6LFR96PBSD

Brushed Steel / Midnight Black Housing Painted Brushed Steel Aluminum Blades with Midnight Black Blade Arms Frosted Acrylic Lens



6LFR96MBKD

Midnight Black / Brushed Steel Housing Midnight Black Aluminum Blades with Brushed Steel Blade Arms Frosted Acrylic Lens



6LFR96RZWD

Matte White / Brushed Steel Housing Matte White Aluminum Blades with Brushed Steel Blade Arms Frosted Acrylic Lens

LOFT 96

SEAN LAVIN









BLADES

(6) Blades (Included) 13° Blade Pitch 96" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 15W

Light Output: 1080 Lumens Net

CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13"

B. Blade Drop: 10"

C. Housing Width: 7.9"

D. Downrod: 8" (additional lengths pg. 236)

Motor Size: 125mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	13634 CFM	9682 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	413 CFM/Watt	500 CFM/Watt

LOFT 72

SEAN LAVIN









Shown with Finishing Cap



6LFR72MBKD

Midnight Black / Brushed Steel Housing Midnight Black Aluminum Blades with Brushed Steel Blade Arms Frosted Acrylic Lens



6LFR72RZWBBSD

Matte White / Burnished Brass Housing Matte White Aluminum Blades with Burnished Brass Blade Arms Frosted Acrylic Lens



6LFR72RZWD

Matte White / Brushed Steel Housing Matte White Aluminum Blades with Brushed Steel Blade Arms Frosted Acrylic Lens

LOFT 72

SEAN LAVIN









BLADES

(6) Blades (Included)

13° Blade Pitch

72" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 20W

Light Output: 1080 Lumens Net

CCT: 3000K CRI: 90x+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer




COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215)

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 13"
- B. Blade Drop: 10.3"
- C. Housing Width: 7.9"
- D. Downrod: 8" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 125mm x 25mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	19 Watts
AIRFLOW	8378 CFM	5693 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	252 CFM/Watt	302 CFM/Watt







6LFR62MBKD

Midnight Black / Brushed Steel Housing $Midnight\ Black\ Aluminum\ Blades\ with\ Brushed\ Steel\ Blade\ Arms$ Frosted Acrylic Lens



6LFR62RZWBBSD

Matte White / Burnished Brass Housing Matte White Aluminum Blades with Burnished Brass Blade Arms Frosted Acrylic Lens



6LFR62RZWD

Matte White / Brushed Steel Housing Matte White Aluminum Blades with Brushed Steel Blade Arms Frosted Acrylic Lens

LOFT 62

SEAN LAVIN









BLADES

(6) Blades (Included)

13° Blade Pitch

62" Blade Sweep

BLADE MATERIAL

Aluminum

LAMPING

Integrated LED: 20W

Light Output: 1080 Lumens Net

CCT: 3000K

CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer




COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215)

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13"

B. Blade Drop: 10.3"

C. Housing Width: 7.9"

D. Downrod: 8" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 125mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	15 Watts
AIRFLOW	6928 CFM	4993 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	310 CFM/Watt	327 CFM/Watt











3ALBR60MBKD Midnight Black Housing Midnight Black Blades Frosted Acrylic Lens



3ALBR60RZWD Matte White Housing

Matte White Blades Frosted Acrylic Lens

ALBA 60

THOMAS O'BRIEN







BLADES

(3) Blades (Included) 18° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W Light Output: 664 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



A. Fixture Drop: 19.1" and 15.1"

B. Blade Drop: 15.7" and 11.7"

C. Housing Width: 7.2"

D. Downrod: 8" and 4" (additional lengths pg. 236)

Motor Size: 155 x 122mm

FTC ENERGY GUIDE - 4" DOWNROD

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	35 Watts	20 Watts
AIRFLOW	6262 CFM	4467 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	179 CFM/Watt	220 CFM/Watt

FTC ENERGY GUIDE - 8" DOWNROD

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	21 Watts
AIRFLOW	7545 CFM	5257 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	222 CFM/Watt	255 CFM/Watt



5VMR72OZD

Oil Rubbed Bronze Housing Oil Rubbed Bronze/Walnut Reversible Carved Wood Blades Frosted Acrylic Lens



5VMR72BSD

Brushed Steel Housing Silver/Light Grey Weathered Oak Reversible Carved Wood Blades Frosted Acrylic Lens



5VMR72RZWD

Matte White Housing Matte White Carved Wood Blades Frosted Acrylic Lens

VISION 72

SEAN LAVIN







BLADES

(5) Blades (Included) 12° Blade Pitch 72" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W Light Output: 1390 Lumens Net CCT: 3000K

CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 16.7"

B. Blade Drop: 13.5"

C. Housing Width: 9.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 22mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	10197 CFM	7512 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	308 CFM/Watt	353 CFM/Watt







3VNMR56RBD-V1

Roman Bronze Housing Bronze/American Walnut Blades Frosted Acrylic Lens



3VNMR56BSLGD-V1

Brushed Steel Housing Silver/Light Grey Weathered Oak Blades Frosted Acrylic Lens



3VNMR56RZWD-V1

Matte White Housing Matte White Blades Frosted Acrylic Lens

VISION 56

SEAN LAVIN





BLADES

(3) Blades (Included) 12° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 950 Lumens Net CCT: 2700K CRI: 90+ Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14" B. Blade Drop: 10.7"

C. Housing Width: 9.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 172mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	37 Watts
AIRFLOW	5204 CFM	3334 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	82 CFM/Watt	89 CFM/Watt





3VNR52BSLGD-V1

Brushed Steel Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens



3VNR52OZD-V1

Oil Rubbed Bronze Housing
Oil Rubbed Bronze ABS Blades
Frosted Acrylic Lens

VISION 52

SEAN LAVIN



BLADES

(3) Blades (Included)12° Blade Pitch52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 900 Lumens Net CCT: 2700 K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Combo Hand-held/ Wall Mount Remote, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.6"
- B. Blade Drop: 13"
- C. Housing Width: 8.3"
- D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	32 Watts
AIRFLOW	3406 CFM	2685 CFM
ENERGY COSTS	N/A	\$9 Per Year
EFFICIENCY	78 CFM/Watt	83 CFM/Watt





3VNR42BSLGD-V1

Brushed Steel Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens



3VNR42BSD-V1

Brushed Steel Housing Teak ABS Blades Frosted Acrylic Lens



3VNR42RZWD-V1

Matte White Housing Matte White ABS Blades Frosted Acrylic Lens

VISION 42

SEAN LAVIN



BLADES

(3) Blades (Included)12° Blade Pitch42" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 900 Lumens Net CCT: 2700 K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Combo Hand-held/ Wall Mount Remote, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.6"

B. Blade Drop: 13"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	41 Watts	29 Watts
AIRFLOW	2185 CFM	1678 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	53 CFM/Watt	57 CFM/Watt
	ELECTRICITY AIRFLOW ENERGY COSTS	ELECTRICITY 41 Watts AIRFLOW 2185 CFM ENERGY COSTS N/A







3CLMR56BSD-V1
Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens





Brushed Steel Housing Silver/Light Grey Weathered Oak Blades Frosted Acrylic Lens

CLARITY 56

SEAN LAVIN



BLADES

(3) Blades (Included)12° Blade Pitch56" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 950 Lumens Net CCT: 2700K CRI: 90+ Finishing Cap Included

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



FAN SPECIFICATIONS



A. Fixture Drop: 9.2" B. Blade Drop: 7.6" C. Housing Width: 9.7"

Motor Size: 172mm x 17mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	38 Watts
AIRFLOW	4381CFM	2753 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	73 CFM/Watt

CLARITY 52

SEAN LAVIN



BLADES

(3) Blades (Included) 12° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 900 Lumens Net CCT: 2700K CRI: 90+

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

Combo Hand-held/ Wall Mount Remote, Reverse and Dimmer



FAN SPECIFICATIONS



A. Fixture Drop: 9.2" B. Blade Drop: 7.6" C. Housing Width: 8.8"

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	36 Watts
AIRFLOW	3682 CFM	2804 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	59 CFM/Watt	77 CFM/Watt



3CLYR52OZD-V1

Oil Rubbed Bronze Housing Oil Rubbed Bronze ABS Blades Frosted Acrylic Lens



3CLYR52BSLGD-V1

Brushed Steel Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens



3CLYR52BSD-V1

Brushed Steel Housing Teak ABS Blades Frosted Acrylic Lens



3CLYR52RZWD-V1

Matte White Housing Matte White ABS Blades Frosted Acrylic Lens



3CLYR42OZD-V1

Oil Rubbed Bronze Housing Oil Rubbed Bronze ABS Blades Frosted Acrylic Lens



3CLYR42BSLGD-V1

Brushed Steel Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens



3CLYR42BSD-V1

Brushed Steel Housing Teak ABS Blades Frosted Acrylic Lens



3CLYR42RZWD-V1

Matte White Housing Matte White ABS Blades Frosted Acrylic Lens

CLARITY 42

SEAN LAVIN



BLADES

(3) Blades (Included)12° Blade Pitch42" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 900 Lumens Net CCT: 2700 K CRI: 90+

MOUNTING


Flush Mount Only

INCLUDED CONTROLS

Combo Hand-held/ Wall Mount Remote, Reverse and Dimmer



FAN SPECIFICATIONS



A. Fixture Drop: 9.2"
B. Blade Drop: 7.6"

C. Housing Width: 8.5"

Motor Size: 153mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	30 Watts
AIRFLOW	2401CFM	1870 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	62 CFM/Watt	63 CFM/Watt







3CQR56MBKD

Midnight Black Housing Midnight Black Blades Clear Etched Glass



3CQR56RZWD

Matte White Housing Matte White Blades Clear Etched Glass

CIRQUE 56

SEAN LAVIN







BLADES

(3) Blades (Included) 15° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 1080 Lumens Net

CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5"

B. Blade Drop: 11.3"

C. Housing Width: 9.4"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 120mm x 20mm

I TO ENERGY GOIDE			
	STANDARD	HIGHSPEED	WEIGHTED AVERAGE
	ELECTRICITY	28 Watts	19 Watts
	AIRFLOW	7103 CFM	5102 CFM
	ENERGY COSTS	N/A	\$5 Per Year
	EFFICIENCY	252 CFM/Watt	276 CFM/Watt











3ADR60AGP Aged Pewter Housing Light Grey Weathered Oak ABS Blades



Matte Black Housing Matte Black ABS Blades



3ADR60BS Brushed Steel Housing Silver ABS Blades



3ADR60RZW Matte White Housing Matte White ABS Blades

ADLER 60

SEAN LAVIN







BLADES

(3) Blades (Included) Variable Blade Pitch 60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Controls ESSWC-7-WH, ESSWC-8 (pg. 214) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 12.5"

B. Blade Drop: 13.3"

C. Housing Width: 6"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 85mm x 28mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	20 Watts
AIRFLOW	5818 CFM	3996 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	200 CFM/Watt	200 CFM/Watt









Shown with Finishing Cap



3AMR60AGPD

Aged Pewter Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens



3AMR60BSD

Brushed Steel Housing Silver ABS Blades Frosted Acrylic Lens



3AMR60RZWD

Matte White Housing $Matte\,White\,AB\,S\,Blades$ Frosted Acrylic Lens

ARMSTRONG 60

SEAN LAVIN









BLADES

(3) Blades (Included) 16° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 15W Light Output: 725 Lumens Net CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"

B. Blade Drop: 12.6"

C. Housing Width: 6.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	22 Watts
AIRFLOW	7732 CFM	5356 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	233 CFM/Watt	248 CFM/Watt





Shown with Finishing Cap



3RZR52AGP

Aged Pewter Housing Light Grey Weathered Oak Blades



3RZR52BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



3RZR52MBK

Midnight Black Housing Midnight Black/American Walnut Reversible Blades



3RZR52RZW

Matte White Housing Matte White Blades

ROZZEN 52







BLADES

(3) Blades (Included)

13° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) LED Light Kit Available MC262 (shown on pg. 223) Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



A. Fixture Drop: 12.6"

B. Blade Drop: 12"

C. Housing Width: 6.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 16mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	21 Watts	15 Watts
AIRFLOW	5310 CFM	3712 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	253 CFM/Watt	241 CFM/Watt

ROZZEN 44



3RZR44AGP Aged Pewter Housing Light Grey Weathered Oak Blades



3RZR44BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



3RZR44MBK

Midnight Black Housing Midnight Black/American Walnut Reversible Blades



3RZR44RZW

Matte White Housing Matte White Blades

ROZZEN 44







BLADES

(3) Blades (Included)

13° Blade Pitch

44" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) LED Light Kit Available MC262 (shown on pg. 223) Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



A. Fixture Drop: 12.6"

B. Blade Drop: 12"

C. Housing Width: 6.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 16mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	22 Watts	16 Watts
AIRFLOW	4644 CFM	3022 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	211 CFM/Watt	192 CFM/Watt

JOVIE 58 LED



3JVR58AGPD

Aged Pewter Housing Light Grey Weathered Oak Frosted Acrylic Lens



REV DAMP

3JVR58BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



REV

3JVR58MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



3JVR58RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

JOVIE 58 LED







BLADES

(3) Blades (Included)

12° Blade Pitch

58" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 18W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Handheld Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.7"

B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



3JVR58RZW Matte White Housing Matte White Blades



3JVR58BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



3JVR58MBK

Midnight Black Housing Midnight Black/American Walnut Reversible Blades



3JVR58AGP

Aged Pewter Housing Light Grey Weathered Oak Blades

JOVIE 58







BLADES

(3) Blades (Included)

12° Blade Pitch

58" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Handheld Remote, 6-speed,

Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5"

B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD

JOVIE 52 LED



3JVR52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



3JVR52AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Frosted Acrylic Lens



REV

3JVR52MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



3JVR52RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

JOVIE 52 LED





BLADES

(3) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 18W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 15.4"

B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD











3JVR52AGPAged Pewter Housing
Light Grey Weathered Oak Blades



3JVR52BSBrushed Steel Housing
Silver/American Walnut Reversible Blades



3JVR52MBKMidnight Black Housing

Midnight Black/American Walnut Reversible Blades



3JVR52RZWMatte White Housing
Matte White Blades

JOVIE 52



BLADES

(3) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Wall Mount Control, 4-speed, Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5" B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	36 Watts
AIRFLOW	5901CFM	4239 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	95 CFM/Watt	117 CFM/Watt

JOVIE 44 LED



....

3JVR44BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



3JVR44AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Frosted Acrylic Lens



REV

3JVR44MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



3JVR44RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

JOVIE 44 LED



BLADES

(3) Blades (Included) 12° Blade Pitch

BLADE MATERIAL

44" Blade Sweep

Plywood

LAMPING

Integrated LED: 18W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 15.4" B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



REV

3JVR44MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades



3JVR44BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



3JVR44AGP

Aged Pewter Housing Light Grey Weathered Oak Blades



3JVR44RZW

Matte White Housing Matte White Blades

JOVIE 44



BLADES

(3) Blades (Included)

12° Blade Pitch

44" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Wall Mount Control, 4-speed, Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5"

B. Blade Drop: 11.6"

C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



3SY52BSD

Brushed Steel Housing American Walnut/Silver Blades Frosted Acrylic Lens



Midnight Black Housing Midnight Black/American Walnut Blades Frosted Acrylic Lens



3SY52OZD

Oil Rubbed Bronze Housing Oil Rubbed Bronze/American Walnut Blades Frosted Acrylic Lens



3SY52RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

SYRUS 52



BLADES

(3) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: (2) 9.3W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-speed Pull Chain Control, Manual Reverse Switch



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 15.9"

B. Blade Drop: 11.4"

C. Housing Width: 9.4"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	40 Watts
AIRFLOW	5336 CFM	3944 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	86 CFM/Watt	99 CFM/Watt



3ERAR52MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Matte Opal Glass



3ERAR52AGP

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass



REV

3ERAR52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



3ERAR52RZWD

Matte White Housing Matte White Blades Matte Opal Glass

ERA 52





BLADES

(3) Blades (Included)

13° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K CRI: 90+

MC362 Finishing Cap Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 18°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15"

B. Blade Drop: 10.9"

C. Housing Width: 8.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD

ERA 44



3ERAR44AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass



REV 3ERAR44BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



3ERAR44MBKD

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades
Matte Opal Glass



3ERAR44RZWD

Matte White Housing Matte White Blades Matte Opal Glass

ERA 44



BLADES

(3) Blades (Included)

13° Blade Pitch

44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K CRI: 90+

MC362 Finishing Cap Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 18°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15"

B. Blade Drop: 10.9"

C. Housing Width: 8.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD







3AVOR56RZWD-V1

Matte White Housing Matte White ABS Blades Frosted Acrylic Lens

AVVO 56

SEAN LAVIN







BLADES

(3) Blades (Included) Variable Blade Pitch 56" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 15W

Light Output: 950 Lumens Net

CCT: 2700K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 25°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 12.9"

B. Blade Drop: 10.8"


C. Housing Width: 9.7"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 120mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	24 Watts	12 Watts
AIRFLOW	6461CFM	3885 CFM
ENERGY COSTS	N/A	\$3 Per Year
EFFICIENCY	269 CFM/Watt	325 CFM/Watt







5ATR56HABD

Hand-Rubbed Antique Brass Housing Dark Walnut Carved Wood Blades Frosted White Glass



5ATR56MBKD

Midnight Black Housing Dark Walnut Carved Wood Blades Frosted White Glass



5ATR56PND

Polished Nickel Housing Dark Walnut Carved Wood Blades Frosted White Glass

ATLANTIC 56

CHAPMAN & MYERS







BLADES

(5) Blades (Included) 14° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W Light Output: 1800 Lumens CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)


FAN SPECIFICATIONS



- A. Fixture Drop: 17.8"
- B. Blade Drop: 12.9"
- C. Housing Width: 9.7"
- D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 178mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	19 Watts
AIRFLOW	7531 CFM	4831CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	268 CFM/Watt	254 CFM/Watt

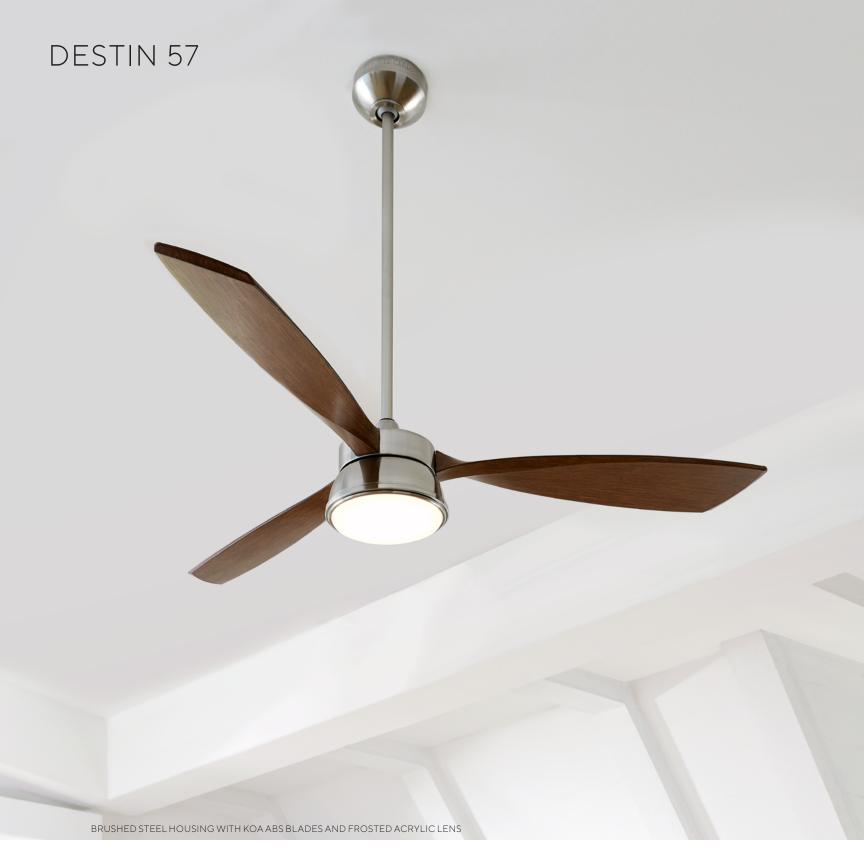





3DSTR57BSD

Brushed Steel Housing Koa ABS Blades Frosted Acrylic Lens



3DSTR57AGPD

Aged Pewter Housing Light Grey Weathered Oak ABS Blades Frosted Acrylic Lens

DESTIN 57







BLADES

(3) Blades (Included)

16° Blade Pitch

57" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 1060 Lumens Net CCT: 2700K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.7"

B. Blade Drop: 8.6""

C. Housing Width: 7"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 120mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	17 Watts
AIRFLOW	5624 CFM	3928 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	225 CFM/Watt	225 CFM/Watt





Shown with Finishing Cap



3AKR56BKD Matte Black Housing with Aged Brass

Matte Black Blades Matte Opal Glass



3AKR56RZWD

Matte White Housing with Chrome Matte White Blades Matte Opal Glass

AKOVA 56

SEAN LAVIN







BLADES

(3) Blades (Included) 17° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 980 Lumens Net CCT: 3000K

CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.4" B. Blade Drop: 10.2"

C. Housing Width: 8.5"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 125mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	25 Watts
AIRFLOW	4515 CFM	3279 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	133 CFM/Watt	131 CFM/Watt

ARCADE 68

SEAN LAVIN











3ARR68MBK Midnight Black Housing Midnight Black ABS Blades



Matte White Housing with Burnished Brass Matte White ABS Blades



Brushed Steel Housing Silver ABS Blades

ARCADE 68

SEAN LAVIN





BLADES

(3) Blades (Included) 10° Blade Pitch 68" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


6-Speed Hand-held Remote with Dimmer and Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Available (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 15"

B. Blade Drop: 13.7"

C. Housing Width: 7.7"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 22mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	37 Watts	24 Watts
AIRFLOW	9289 CFM	5764 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	248 CFM/Watt	244 CFM/Watt



Customize your look with Arcade Finish Kits (pg. 226)



3AR54MBKMidnight Black Housing
Midnight Black ABS Blades



3AR54BSBrushed Steel Housing
Silver ABS Blades



3AR54RZWBBS

Matte White with Burnished Brass

Matte White ABS Blades

ARCADE 54

SEAN LAVIN

BLADES

(3) Blades (Included)10° Blade Pitch54" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


3-speed Pull Chain Control



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Available (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



- A. Fixture Drop: 15"
- B. Blade Drop: 13.7"
- C. Housing Width: 7.7"
- D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	62 Watts	39 Watts
AIRFLOW	6112 CFM	4534 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	99 CFM/Watt	11`5 CFM/Watt



Customize your look with Arcade Finish Kits (pg. 226)







8KGR72BKD

Matte Black Housing Dark Walnut Blades Opal Etched Glass

KINGSTON 72









BLADES

(8) Blades (Included) Variable Blade Pitch 72" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 18W Light Output: 890 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-8 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 17.3" B. Blade Drop: 14.8" C. Housing Width: 8.3"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 120mm x 30mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	20 Watts
AIRFLOW	10213 CFM	7713 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	367 CFM/Watt	385 CFM/Watt

LOWDEN 60 SMART



5LWDSM60BSD

Brushed Steel Housing
Silver/American Walnut Reversible Blades
Frosted Acrylic Lens



5LWDSM60AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Frosted Acrylic Lens



REV

5LWDSM60BSLGD

Brushed Steel Housing Silver/Light Grey Weathered Oak Reversible Blades Frosted Acrylic Lens



5LWDSM60RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens



5LWDSM60MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens

LOWDEN 60 SMART











BLADES

(5) Blades (Included)

12° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse










COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.9"

B. Blade Drop: 12.2"

C. Housing Width: 7.8"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 12mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	39 Watts	24 Watts
AIRFLOW	6729 CFM	4703 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	173 CFM/Watt	192 CFM/Watt











5LWDR52AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Frosted Acrylic Lens



5LWDR52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



REV

5LWDR52BSLGD

Brushed Steel Housing Silver/Light Grey Weathered Oak Reversible Blades Frosted Acrylic Lens



5LWDR52MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



5LWDR52RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

LOWDEN 52





BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Handheld Remote, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 16"

B. Blade Drop: 13.3"

C. Housing Width: 7.8"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 20mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	63 Watts	38 Watts
AIRFLOW	5229 CFM	3585 CFM
ENERGYCOSTS	N/A	\$11 Per Year
EFFICIENCY	83 CFM/Watt	94 CFM/Watt

AVILA 54



3AVLR54SBD Satin Brass Housing Matte White Matte Opal Glass



3AVLR54BSD

Brushed Steel Housing Silver ABS Matte Opal Glass



3AVLR54AGPD

Aged Pewter Housing Light Grey Weathered Oak Matte Opal Glass

AVILA 54



BLADES

(3) Blades (Included)10° Blade Pitch54" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 16.5W Light Output: 770 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


3-Wire Wall Mount Control, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 15.5"

B. Blade Drop: 12.9"

C. Housing Width: 7.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

- TO ENTEROT GOIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



3STMSM60MBKDMidnight Black Housing
Midnight Black Blades
Matte Opal Glass



REV

3STMSM60BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



3STMSM60RZWD

Matte White Housing Matte White Blades Matte Opal Glass

STREAMING 60 SMART

BARBARA BARRY









BLADES

(3) Blades (Included) 15° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 3000K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

 $Smart\ with\ Bond\ Home\ App\ (Download)$ Hand-held Remote, 6-speed, Reverse and Dimmer










COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 17.9"

B. Blade Drop: 15.9"

C. Housing Width: 7.5"

D. Downrod: 8" (additional lengths pg. 236)

Motor Size: 155mm x 22mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	TBD
AIRFLOW	7640 CFM	TBD
ENERGYCOSTS	N/A	TBD
EFFICIENCY	246 CFM/Watt	TBD









Shown with Finishing Cap



3STMSM52MBKD

Midnight Black Housing Midnight Black Blades Matte Opal Glass



3STMSM52RZWD

Matte White Housing Matte White Blades Matte Opal Glass



3STMSM52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass

STREAMING 52 SMART

BARBARA BARRY









BLADES

(3) Blades (Included) 15° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 3000K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse and Dimmer










COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 17.9"

B. Blade Drop: 15.9"

C. Housing Width: 7.5"

D. Downrod: 8" (additional lengths pg. 236)

Motor Size: 125mm x 16mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	TBD
AIRFLOW	5605 CFM	TBD
ENERGYCOSTS	N/A	TBD
EFFICIENCY	187 CFM/Watt	TBD











5LLR56BSD-V1 Brushed Steel Housing Silver Blades Clear Frosted Glass



5LLR56RZWD-V1 Matte White Housing Matte White Blades Clear Frosted Glass

LILY 56







BLADES

(5) Blades (Included) 14° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 15W Light Output: 715 Lumens Net CCT: 2700K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 16.2"
- B. Blade Drop: 13.3"
- C. Housing Width: 5.5"
- D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 120mm x 25mm

TO ENERGY GOIDE		
STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	19 Watts
AIRFLOW	6624 CFM	4698 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	254 CFM/Watt	253 CFM/Watt

BUTTERFLY 54











4BFR54BSD-V1

Brushed Steel Housing Silver Blades Opal Etched Glass

BUTTERFLY 54





BLADES

(4) Blades (Included) 15° Blade Pitch 54" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 15W Light Output: 870 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 22°

INCLUDED CONTROLS


Combo Hand-held/ Wall Mount Remote, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 20"

B. Blade Drop: 20.67"

C. Housing Width: 6.9"

D. Downrod: 8" (additional lengths pg. 236)

Motor Size: 153mm x 22mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	64 Watts	41 Watts
AIRFLOW	4903 CFM	3297 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	76 CFM/Watt	81 CFM/Watt



TRANSITIONAL

Aspen 70	126
Aspen 56	128
Bryden 60 Smart	132
Centro 44	146
Discus 52 Smart	148
Discus Classic 52	150
Discus Classic 44	152
Dover 68	142
Dover 60	144
Hicks 60	130
lkon 52	154
Ikon 44	156
Launceton 56	138
Metrograph 56	140
Prairie 72	120
Prairie 62	122
Prairie 52	124
Ruhlmann 52 Smart	134
Subway 56	136
Traverse 52	15.8

PRAIRIE 72



14PRR72AGPD

Aged Pewter Housing Distressed Grey Weathered Oak Blades Frosted Acrylic Lens



Shown with Finishing Cap



14PRR72BSD

Brushed Steel Housing Silver/Washed Oak Blades Frosted Acrylic Lens

PRAIRIE 72









BLADES

(14) Blades (Included) 14° Blade Pitch 72" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W Light Output: 740 Lumens Net CCT: 2700K CRI: 90+ Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.1"
- B. Blade Drop: 13.1"
- C. Housing Width: 6.9"
- D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	21 Watts
AIRFLOW	7519 CFM	5326 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	228 CFM/Watt	251 CFM/Watt











14PRR62AGPD

Aged Pewter Housing Distressed Grey Weathered Oak Blades Frosted Acrylic Lens



14PRR62BSD

Brushed Steel Housing Silver/Washed Oak Blades Frosted Acrylic Lens

PRAIRIE 62







BLADES

(14) Blades (Included) 14° Blade Pitch 62" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W Light Output: 740 Lumens Net CCT: 2700K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"

B. Blade Drop: 13.1"

C. Housing Width: 6.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	34 Watts	23 Watts
AIRFLOW	7233 CFM	5003 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	220 CFM/Watt	221 CFM/Watt











REV

14PRR52BSD

Brushed Steel Housing Silver/Washed Oak Blades Frosted Acrylic Lens



14PRR52AGPD

Aged Pewter Housing Distressed Grey Weathered Oak Blades Frosted Acrylic Lens

PRAIRIE 52







BLADES

(14) Blades (Included) 14° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 15W Light Output: 740 Lumens Net CCT: 2700K CRI: 90+ Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.1"

B. Blade Drop: 13.1"

C. Housing Width: 6.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	23 Watts	16 Watts
AIRFLOW	5069 CFM	3310 CFM
ENERGY COSTS	N/A	\$4 Per Year
EFFICIENCY	220 CFM/Watt	211 CFM/Watt



5ASPR70AGP

Aged Pewter Housing
Dark Walnut Carved Wood Blades



5ASPR70BS

Brushed Steel Housing Light Grey Weathered Oak Carved Wood Blades Shown With Optional Yoke



5ASPR70MBK

Midnight Black Housing Midnight Black Carved Wood Blades Shown With Optional Yoke



5ASPR70BBS

Burnished Brass Housing Matte White Carved Wood Blades Shown With Optional Yoke



5ASPR70RZW

Matte White Housing Matte White Carved Wood Blades Shown With Optional Yoke

ASPEN 70

SEAN LAVIN







BLADES

(5) Blades (Included) 12° Blade Pitch 70" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20° Includes Optional Four-Armed Decorative Yoke Cover (shown)


INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer

COMPATIBLE ACCESSORIES

Light Kit Available MC263 (pg.223) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.1"

B. Blade Drop: 12.9"

C. Housing Width: 5.9"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 120mm X 25mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	37 Watts	24 Watts
AIRFLOW	7270 CFM	4985 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	196 CFM/Watt	211 CFM/Watt



Decorative Yoke Accessory Included



5ASPR56AGP

Aged Pewter Housing Dark Walnut Carved Wood Blades Shown With Optional Yoke



5ASPR56BBS

Burnished Brass Housing Matte White Carved Wood Blades Shown With Optional Yoke



5ASPR56BS

Brushed Steel Housing Light Grey Weathered Oak Carved Wood Blades Shown With Optional Yoke



5ASPR56MBK

 $Midnight\,Black\,Housing$ Midnight Black Carved Wood Blades Shown With Optional Yoke



5ASPR56PN

Polished Nickel Housing Dark Walnut Carved Wood Blades Shown With Optional Yoke



5ASPR56RZW

Matte White Housing Matte White Carved Wood Blades Shown With Optional Yoke

ASPEN 56

SEAN LAVIN







BLADES

(5) Blades (Included) 13° Blade Pitch 54" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20° Includes Optional Four-Armed Decorative Yoke Cover (shown)

INCLUDED CONTROLS


6-speed Remote Control with Reverse and Dimming



COMPATIBLE ACCESSORIES

Wall Control ESSWC-9 (pg. 215) Light Kit Available MC263 (pg.223) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 13.1"

B. Blade Drop: 12.9"

C. Housing Width: 5.9"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 120mm x 25mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	30 Watts	20 Watts
AIRFLOW	7228 CFM	4981 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	240 CFM/Watt	249 CFM/Watt



Decorative Yoke Accessory Included









Shown with Finishing Cap



3HCKR60BNZHABD

Deep Bronze/Hand-Rubbed Antique Brass Housing Bronze Carved Wood Blades Matte Opal Glass



3HCKR60HABD

Hand-Rubbed Antique Brass Housing Dark Mahogany Carved Wood Blades Matte Opal Glass

HICKS 60

THOMAS O'BRIEN







BLADES

(3) Blades (Included) 13° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W Light Output: 800 Lumens Net CCT: 3000K CRI: 90+ Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



- A. Fixture Drop: 15.6"
- B. Blade Drop: 11.8"
- C. Housing Width: 9.6"
- D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"


Motor Size: 178mm x 22mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE	
ELECTRICITY	28 Watts	18 Watts	
AIRFLOW	8752 CFM	5746 CFM	
ENERGY COSTS	N/A	\$5 Per Year	
EFFICIENCY	317 CFM/Watt	311 CFM/Watt	

BRYDEN 60 SMART

CHAPMAN & MYERS











3BRYSM60HABD

Hand-Rubbed Antique Brass Housing Matte White Blades Frosted Acrylic Lens



3BRYSM60BSD

Brushed Steel Housing Dark Walnut Blades Frosted Acrylic Lens



3BRYSM60MBKD

 $Midnight\,Black\,Housing$ Dark Walnut Blades Frosted Acrylic Lens

BRYDEN 60 SMART

CHAPMAN & MYERS









BLADES

(3) Blades (Included) 18° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 18W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 15°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse and Dimmer










COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 14.6"
- B. Blade Drop: 13.4"
- C. Housing Width: 6.8"
- D. Downrod: 4" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 125mm x 30mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



3RULSM52RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens



3RULSM52BSD

Brushed Steel Housing Silver ABS Blades Frosted Acrylic Lens



3RULSM52HABD

Hand-Rubbed Antique Brass Housing Matte White Blades Frosted Acrylic Lens



3RULSM52MBKD

Midnight Black Housing Midnight Black Blades Frosted Acrylic Lens

RUHLMANN 52 SMART

CHAPMAN & MYERS









BLADES

(3) Blades (Included) 20° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse










COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 14.5"

B. Blade Drop: 13.3"

C. Housing Width: 6.5"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 125mm x 30mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD



4SBWR56HAB Hand-Rubbed Antique Brass Housing Matte White Blades



4SBWR56MBK

Midnight Black Housing Midnight Black Blades



4SBWR56PN

Polished Nickel Housing Dark Walnut Blades

SUBWAY 56

CHAPMAN & MYERS





BLADES

(4) Blades (Included) 15° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Handheld Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



- A. Fixture Drop: 16.1"
- B. Blade Drop: 16.1"
- C. Housing Width: 10.7"
- D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 178mm x 12mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD











4LNCR56HAB Hand-Rubbed Antique Brass Housing Matte White ABS Blades



Midnight Black Housing Midnight Black ABS Blades

LAUNCETON 56

CHAPMAN & MYERS







BLADES

(4) Blades (Included) 16° Blade Pitch 56" Blade Sweep

BLADE MATERIAL


ABS

INCLUDED CONTROLS

Hand-held Remote, 6-speed, Reverse and Dimmer



FAN SPECIFICATIONS



A. Fixture Drop: 14"

B. Blade Drop: 13.7"


C. Housing Width: 6.9"

D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 120mm x 20mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	28 Watts	19 Watts
AIRFLOW	6644 CFM	4744 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	233 CFM/Watt	248 CFM/Watt















4TSR56BNZHABD

Deep Bronze Housing with Hand-Rubbed Antique Brass Bronze Carved Wood Blades Frosted White Glass

METROGRAPH 56

THOMAS O'BRIEN







BLADES

(4) Blades (Included) 13° Blade Pitch 56" Blade Sweep

BLADE MATERIAL

Carved Wood

LAMPING

Integrated LED: 20W Light Output: 1600 Lumens CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 16.6" B. Blade Drop: 13.3" C. Housing Width: 8.6"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 12mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	32 Watts	20 Watts
AIRFLOW	6944 CFM	4833 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	219 CFM/Watt	247 CFM/Watt



5DVR68OZ

Oil Rubbed Bronze Housing Bronze/KOA Carved Wood Blades



Shown with Optional Light Kit MC261BS



5DVR68RZW Matte White Housing Matte White Carved Wood Blades

DOVER 68





BLADES

(5) Blades (Included) 14° Blade Pitch

BLADE MATERIAL

68" Blade Sweep

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 15.8"

B. Blade Drop: 13.5"

C. Housing Width: 12.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 22mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	38 Watts	23 Watts
AIRFLOW	9508 CFM	5156 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	249 CFM/Watt	264 CFM/Watt

DOVER 60









Shown with Light Kit MC261 (pg. 220)



5DVR60OZ

Oil Rubbed Bronze Housing Oil Rubbed Bronze/KOA Carved Wood Blades



5DVR60RZW

Matte White Housing Matte White Carved Wood Blades



5DVR60AGP

Aged Pewter Housing Light Grey Weathered Oak Carved Wood Blades



5DVR60BS

Brushed Steel Housing Silver/Light Grey Weathered Oak Carved Wood Blades

DOVER 60





BLADES

(5) Blades (Included)

14° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS


6-speed Remote with Dimmer and Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 15.8"

B. Blade Drop: 13.5"

C. Housing Width: 12.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 178mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	38 Watts	23 Watts
AIRFLOW	7988 CFM	5156 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	212 CFM/Watt	221 CFM/Watt

CENTRO 44



5CQM44RZW Matte White Housing Matte White Blades



5CQM44RB

Roman Bronze Housing Bronze/American Walnut Reversible Blades



5CQM44BS

Brushed Steel Housing Silver/Light Grey Weathered Oak Blades



5CQM44AGP

Aged Pewter Housing Light Grey Weathered Oak Blades

CENTRO 44

BLADES

(5) Blades (Included)14° Blade Pitch44" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 18° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 13.1"

B. Blade Drop: 12"

C. Housing Width: 11"

D. Downrod: 4" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	30 Watts
AIRFLOW	3252 CFM	2400 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	74 CFM/Watt	81 CFM/Watt

HUGGER	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	44 Watts	30 Watts
AIRFLOW	3068 CFM	2297 CFM
ENERGY COSTS	N/A	\$8 Per Year
EFFICIENCY	70 CFM/Watt	77 CFM/Watt

DISCUS 52 SMART







5DISM52BSD

Brushed Steel Housing Silver/American Walnut Blades Matte Opal Glass



5DISM52AGPD

Aged Pewter Housing $Light\,Grey\,Weathered\,Oak\,Blades$ Matte Opal Glass



5DISM52MBKD

Midnight Black Housing Midnight Black Blades Matte Opal Glass



5DISM52RZWD

Matte White Housing Matte White Blades Matte Opal Glass

DISCUS 52 SMART









BLADES

(5) Blades (Included) 12° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 1000 Lumens Net CCT: 3000K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Smart with Bond Home App Hand-held Remote, 5-speed, Reverse and Dimmer










FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 150mm x 16mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	36 Watts	25 Watts
AIRFLOW	6263 CFM	4310 CFM
ENERGY COSTS	N/A	\$7 Per Year
EFFICIENCY	174 CFM/Watt	171 CFM/Watt

DISCUS CLASSIC 52



5DIC52RBD-V1

Roman Bronze Housing Bronze/American Walnut Reversible Blades Matte Opal Glass



REV

5DIC52BSD-V1

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



5DIC52BKD-V1

Matte Black Housing Matte Black Blades Matte Opal Glass



5DIC52PND-V1

Polished Nickel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



5DIC52AGPD-V1

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass



5DIC52WHD-V1

White Housing | White Blades Matte Opal Glass

DISCUS CLASSIC 52

LED

BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W

 $Light\ Output: 1060\ Lumens\ Net$

CCT: 3000K

CRI: 90+

Optional MC360 Finishing Cap

Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod

and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	3217 CFM	2164 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	49 CFM/Watt	53 CFM/Watt

DISCUS CLASSIC 44



5DIC44PND-V1

Polished Nickel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



REV 5DIC44RBD-V1

Roman Bronze Housing Bronze/American Walnut Reversible Blades Matte Opal Glass



5DIC44BKD-V1

Matte Black Housing Matte Black Blades Matte Opal Glass



5DIC44AGPD-V1

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass



5DIC44BSD-V1

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte Opal Glass



5DIC44WHD-V1

White Housing White Blades Matte Opal Glass

DISCUS CLASSIC 44



BLADES

(5) Blades (Included)

12° Blade Pitch

44" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W

Light Output: 1060 Lumens Net

CCT: 3000K

CRI: 90+

Optional MC360 Finishing Cap

Available (pg. 227)

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3954 CFM	2854 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	3032 CFM	1970 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	52 CFM/Watt	53 CFM/Watt



3IKR52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



3IKR52AGPDAged Pewter Housing

Light Grey Weathered Oak Blades Frosted Acrylic Lens



3IKR52MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



3IKR52RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

IKON 52



BLADES

(3) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: 20W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Flush Mount

INCLUDED CONTROLS


Handheld Remote, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 10.8" B. Blade Drop: 8.5"

C. Housing Width: 9.2"

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGYCOSTS	N/A	TBD
EFFICIENCY	TBD	TBD



3IKR44AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Frosted Acrylic Lens



3IKR44BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Frosted Acrylic Lens



3IKR44MBKD

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Frosted Acrylic Lens



3IKR44RZWD

Matte White Housing Matte White Blades Frosted Acrylic Lens

IKON 44



BLADES

(3) Blades (Included)12° Blade Pitch44" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: 20W Light Output: TBD CCT: 3000K CRI: 90+

MOUNTING

Flush Mount

INCLUDED CONTROLS


Handheld Remote, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 10.8" B. Blade Drop: 8.5" C. Housing Width: 9.2"

Motor Size: 153mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	TBD	TBD
AIRFLOW	TBD	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	TBD	TBD

TRAVERSE 52











5TV52WHD-V1

White Housing White Blades Matte Opal Glass



5TV52BSD-V1

Brushed Steel Housing Silver Blades Matte Opal Glass



5TV52RBD-V1

Roman Bronze Housing Roman Bronze Blades Graduated Amber Glass



5TV52AGPD-V1

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass

TRAVERSE 52



BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 10W LED Bulbs Light Output: 800 Lumens Net CCT: 3000K CRI: 90+

Finishing Cap Included

MOUNTING

Flush Mount Only

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 12"
B. Blade Drop: 6.4"
C. Housing Width: 12.2"

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	41 Watts
AIRFLOW	2327 CFM	1737 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	39 CFM/Watt	43 CFM/Watt



TRADITIONAL

Arezzo 60	164
Colony 60	168
Colony 60 LED	166
Colony 52	172
Colony 52 LED	170
Discus Ornate 52	174
Giarre 60	162
Haven 52 DC	177
Haven 52 DC LED	176
Haven 52 LED 3	180
Haven 52 LED 2	178
Haven 52	182











4GIR60ATIHAB

Antique Iron Housing with Hand-Rubbed Brass Accents Dark Walnut Hand Carved Blades

GIARRE 60

SEAN LAVIN





BLADES

(4) Blades (Included) 17° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 0°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



A. Fixture Drop: 21.8"

B. Blade Drop: 22.2"

C. Housing Width: 9"

D. Downrod: 8" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 155mm x 22mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	20 Watts
AIRFLOW	8342 CFM	5824 CFM
ENERGY COSTS	N/A	\$6 Per Year
EFFICIENCY	254 CFM/Watt	284 CFM/Watt

AREZZO 60











3AOR60ATIHAB

Antique Iron Housing with Hand-Rubbed Brass Accents Dark Walnut Hand Carved Wood Blades

AREZZO 60

SEAN LAVIN





BLADES

(3) Blades (Included) 24° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

Hand Carved Wood

MOUNTING

Maximum Slope Angle with Included Hardware: 0°

INCLUDED CONTROLS


Hand-held Remote, 6-speed, Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-10 (pg. 216)

FAN SPECIFICATIONS



- A. Fixture Drop: 17.5"
- B. Blade Drop: 11.5"
- C. Housing Width: 9.9"
- D. Downrod: 6" (additional lengths pg. 236) All BBS and HAB fans have maximum downrod length of 36"

Motor Size: 178mm x 12mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	35 Watts	18 Watts
AIRFLOW	8286 CFM	5497 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	235 CFM/Watt	307 CFM/Watt

COLONY 60 LED



5CSM6ORBD-V1

Roman Bronze Housing Bronze/American Walnut Reversible Blades Matte White Glass



5CSM60AGPD-V1

Aged Pewter Housing Light Grey Weathered Oak Blades Matte White Glass



5CSM60BSD-V1

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte White Glass



5CSM60RZWD-V1

Matte White Housing Matte White Blades Matte White Glass



5CSM60MBKD-V1

Midnight Black Housing American Walnut/Midnight Black Reversible Blades Matte White Glass

COLONY 60 LED





BLADES

(5) Blades (Included)

12° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 9.3W LED Bulbs Light Output: 800 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 18.5" B. Blade Drop: 11.5"

C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5510 CFM	3963 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	77 CFM/Watt	84 CFM/Watt

HUGGER	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4851CFM	3356 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	63 CFM/Watt	71 CFM/Watt

COLONY 60











5CSM60AGP

Aged Pewter Housing Light Grey Weathered Oak Blades



5CSM60BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



5CSM60RB

Roman Bronze Housing Bronze/American Walnut Reversible Blades



5CSM60RZW

Matte White Housing Matte White Blades



5CSM60MBK

Midnight Black Housing
American Walnut/Midnight Black Reversible Blades

COLONY 60



BLADES

(5) Blades (Included)

12° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 13.5"

B. Blade Drop: 11.5"

C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 188mm x 20mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	5509 CFM	4096 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	76 CFM/Watt	87 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	72 Watts	47 Watts
AIRFLOW	4937 CFM	3633 CFM
ENERGY COSTS	N/A	\$13 Per Year
EFFICIENCY	68 CFM/Watt	77 CFM/Watt

COLONY 52 LED



5COM52AGPD-V1

Aged Pewter Housing Light Grey Weathered Oak Blades Matte White Glass



5COM52RBD-V1

Roman Bronze Housing Bronze/American Walnut Reversible Blades Matte White Glass



5COM52BSD-V1

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte White Glass



5COM52RZWD-V1

Matte White Housing Matte White Blades Matte White Glass



5COM52MBKD-V1

Midnight Black Housing Midnight Black/American Walnut Reversible Blades Matte White Glass

COLONY 52 LED





BLADES

(5) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Downlight: (2) 10W LED Bulbs Light Output: 800 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 17.7" B. Blade Drop: 11.3" C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	4224 CFM	3164 CFM
ENERGYCOSTS	N/A	\$10 Per Year
EFFICIENCY	73 CFM/Watt	85 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2867 CFM	1900 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	49 CFM/Watt	51 CFM/Watt











5COM52RZW

Matte White Housing Matte White Blades



5COM52BS

Brushed Steel Housing
Silver/American Walnut Reversible Blades



5COM52RB

Roman Bronze Housing Bronze/American Walnut Reversible Blades



5COM52AGP

Aged Pewter Housing Light Grey Weathered Oak Blades



REV

5COM52MBK

Midnight Black Housing
Midnight Black/American Walnut Reversible Blades

COLONY 52



BLADES

(5) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 12.8"

B. Blade Drop: 11.3"

C. Housing Width: 11.8"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	4201CFM	3123 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	72 CFM/Watt	84 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	37 Watts
AIRFLOW	2469 CFM	1748 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	42 CFM/Watt	47 CFM/Watt

DISCUS ORNATE 52











5DIO52BKD

Matte Black Housing Matte Black Blades Matte Opal Glass



5DIO52RBD

Roman Bronze Housing Bronze/American Walnut Reversible Blades Matte Opal Glass



5DIO52AGPD

Aged Pewter Housing Light Grey Weathered Oak Blades Matte Opal Glass

DISCUS ORNATE 52



BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

Plywood

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 2700K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	4758 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt

HAVEN 52 DC LED







BLADES

(5) Blades (Included) 12° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Integrated LED: (2) 9W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


3-speed Pull Chain



COMPATIBLE ACCESSORIES

Wall Control ESSWC-11 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 18.3" B. Blade Drop: 11.7" C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	5682 CFM	4255 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	210 CFM/Watt	238 CFM/Watt

FTC ENERGY GUIDE

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	29 Watts	19 Watts
AIRFLOW	5284 CFM	3920 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	184 CFM/Watt	210 CFM/Watt



5HVDC52BSD

Brushed Steel Housing Silver/American Walnut Blades Matte White Glass



5HVDC52RZWD

Matte White Housing Matte White Blades Matte White Glass



5HVDC52BZD

Bronze Housing Bronze/American Walnut Blades Matte White Glass



5HVDC52BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



5HVDC52RZW

Matte White Housing Matte White Blades



5HVDC52BZ

Bronze Housing Bronze/American Walnut Blades

HAVEN 52 DC





BLADES

(5) Blades (Included) 12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

MDF

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Wall Control ESSWC-11 (pg. 216) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9" B. Blade Drop: 11.7" C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 150mm x 16mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	5579 CFM	4156 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	208 CFM/Watt	235 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	33 Watts	19 Watts
AIRFLOW	5308 CFM	3940 CFM
ENERGY COSTS	N/A	\$15Per Year
EFFICIENCY	159 CFM/Watt	209 CFM/Watt

HAVEN 52 LED 2



5HV52RZWD Matte White Housing Matte White Blades Matte White Glass



5HV52BKDMatte Black Housing
Matte Black Blades
Matte White Glass



5HV52BZD

Bronze Housing Bronze/American Walnut Reversible Blades Matte White Glass



5HV52BSD

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte White Glass



5HV52BPD

Brushed Pewter Housing
Silver/American Walnut Reversible Blades
Matte White Glass



5HV52CHD

Chrome Housing Silver/American Walnut Reversible Blades Matte White Glass

HAVEN 52 LED 2



BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Downlight: (2) 9W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 18.3"

B. Blade Drop: 11.7"

C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4355 CFM	3241 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	86 CFM/Watt

HUGGER	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4068 CFM	3020 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	80 CFM/Watt

HAVEN 52 LED 3



5HV52BKF Matte Black Housing Matte Black Blades Matte White Glass



5HV52BSF

Brushed Steel Housing Silver/American Walnut Reversible Blades Matte White Glass



5HV52BZF

Bronze Housing Bronze/American Walnut Reversible Blades Matte White Glass



5HV52CHF

Chrome Housing Silver/American Walnut Reversible Blades Matte White Glass

HAVEN 52 LED 3



BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

MDF

LAMPING

Downlight: (3) 9W LED Light Output: 2400 Lumens Net

CCT: 3000K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 19.9" B. Blade Drop: 11.7" C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4344 CFM	3225 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	85 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4135 CFM	3039 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	69 CFM/Watt	80 CFM/Watt





5HV52BZ

Bronze Housing
Bronze/American Walnut Reversible Blades



5HV52BS

Brushed Steel Housing Silver/American Walnut Reversible Blades



5HV52RZW

Matte White Housing Matte White Blades

HAVEN 52

BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

MDF

MOUNTING

Maximum Slope Angle with Included Hardware: 30° Dual Mount allowing downrod and flush mounting

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218) Light Kit Adaptable (pg. 220)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9" B. Blade Drop: 11.7" C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 12mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4402 CFM	3241 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	74 CFM/Watt	86 CFM/Watt

HUGGER	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	60 Watts	38 Watts
AIRFLOW	4026 CFM	3013 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	68 CFM/Watt	80 CFM/Watt



OUTDOOR

Avila Coastal 54	19C
Boynton 54	196
Collins Coastal Smart 60	188
Cruise 52	198
Cyclone 60	192
Discus Outdoor 52	194
Haven Outdoor 52	202
Haven Outdoor 52 LED	200
Haven Outdoor 44	204
Mayerick Coastal 60	186



MAVERICK COASTAL KEY FEATURES

- 5-year warranty on finish.
- Lifetime warranty on motor.
- Constructed with Marine Grade 316 stainless steel.
- Withstands saltwater spray better than standard Wet-rated fans.

3MGMR60MBKMBK

Midnight Black Housing Midnight Black ABS Blades



3MGMR60RZW

Matte White Housing Matte White ABS Blades

MAVERICK COASTAL 60







BLADES

(3) Blades (Included) V Blade Pitch 60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with included hardware: 15°

INCLUDED CONTROLS

Hand-held Remote

6-speed Reverse



COMPATIBLE ACCESSORIES

Wall Control ESSWC-7 and ESSWC-8 (pg. 214) Slope Celing Canopy Kit MC95 (pg.229)

FAN SPECIFICATIONS



A. Fixture Drop: 12"

B. Blade Drop: 11.8"

C. Housing Width: 7"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 120mm x 30mm

FTC ENERGY GUIDE

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	27 Watts	18 Watts
AIRFLOW	8574 CFM	6195 CFM
ENERGY COSTS	N/A	\$5 Per Year
EFFICIENCY	321 CFM/Watt	341 CFM/Watt

187

COLLINS COASTAL 60 SMART

SEAN LAVIN



MIDNIGHT BLACK HOUSING WITH MIDNIGHT BLACK BLADES









3CLNCSM60MBK Midnight Black Housing Midnight Black Blades



3CLNCSM60RZW Matte White Housing Matte White Blades

COLLINS COASTAL 60 SMART

SEAN LAVIN









BLADES

(3) Blades (Included) 18° Blade Pitch 60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 20°

INCLUDED CONTROLS

Smart with Bond Home App (Download) Hand-held Remote, 6-speed, Reverse










FAN SPECIFICATIONS



A. Fixture Drop: 12.5"

B. Blade Drop: 12.3"

C. Housing Width: 6.4"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 125mm x 30mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	31 Watts	TBD
AIRFLOW	6816 CFM	TBD
ENERGY COSTS	N/A	TBD
EFFICIENCY	220 CFM/Watt	TBD











3AVLCR54MBKD

Midnight Black Housing Midnight Black Blades Matte Opal Glass



3AVLCR54RZWD

Matte White Housing Matte White Blades Matte Opal Glass

AVILA COASTAL 54







BLADES

(3) Blades (Included) 21° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 778 Lumens Net CCT: 3000K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Handheld Remote, 4-speed, Dimmer and Manual Reverse



COMPATIBLE ACCESSORIES

See Control Compatibility Chart (pg. 218) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 16.2"

B. Blade Drop: 13.6"

C. Housing Width: 7.9"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGH SPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	38 Watts
AIRFLOW	4907 CFM	3647 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	85 CFM/Watt	97 CFM/Watt









5CY60BK

Matte Black Housing Matte Black Grain ABS Blades



5CY60RB

Roman Bronze Housing American Walnut Grain ABS Blades



5CY60WH

White Housing White Grain ABS Blades

CYCLONE 60



BLADES

(5) Blades (Included)

13° Blade Pitch

60" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Wall Control ESSWC-4-WH (pg. 213) Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 14.0"

B. Blade Drop: 11.3"

C. Housing Width: 12.8"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 212mm x 25mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	81 Watts	52 Watts
AIRFLOW	6666 CFM	4890 CFM
ENERGY COSTS	N/A	\$15 Per Year
EFFICIENCY	82 CFM/Watt	93 CFM/Watt

DISCUS OUTDOOR 52



5DIW52WHDWhite Housing
White ABS Blades
Matte Opal Glass



5DIW52RBD

Roman Bronze Housing Roman Bronze ABS Blades Matte Opal Glass



5DIW52PBSD

Painted Brushed Steel Housing Painted Brushed Steel ABS Blades Matte Opal Glass



5DIW52BKD

Matte Black Housing Matte Black Blades Matte Opal Glass

DISCUS OUTDOOR 52





BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 20W Light Output: 715 Lumens Net CCT: 2700K CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 15.1"

B. Blade Drop: 10.6"

C. Housing Width: 11.1"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 18mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	66 Watts	41 Watts
AIRFLOW	4781 CFM	3415 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	73 CFM/Watt	83 CFM/Watt











3BTR54ANBZD

Antique Bronze Housing Light Grey Weathered ABS Blades Clear Seeded Glass with Frosted Lens

BOYNTON 54

SEAN LAVIN





BLADES

(3) Blades (Included) 14° Blade Pitch 54" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Integrated LED: 14W Light Output: 580 Lumens Net CCT: 2700K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Hand-held Remote, 4-speed, Reverse and Dimmer



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229)

FAN SPECIFICATIONS



A. Fixture Drop: 19.8"

B. Blade Drop: 13.6"

C. Housing Width: 7.8"

D. Downrod: 6" (additional lengths pg. 236)

Motor Size: 172mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	65 Watts	41 Watts
AIRFLOW	5687 CFM	3929 CFM
ENERGY COSTS	N/A	\$11 Per Year
EFFICIENCY	87 CFM/Watt	97 CFM/Watt











5CU52RB

Roman Bronze Housing American Walnut ABS Blades



5CU52BK

Midnight Black Housing Black ABS Blades



5CU52WH

White Housing White ABS Blades

CRUISE 52



BLADES

(5) Blades (Included)

13° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 14"

B. Blade Drop: 10.9"

C. Housing Width: 10.4"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 172mm x 20mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	68 Watts	42 Watts
AIRFLOW	4324 CFM	3238 CFM
ENERGY COSTS	N/A	\$12 Per Year
EFFICIENCY	64 CFM/Watt	76 CFM/Watt

HAVEN OUTDOOR 52 LED



5HVO52BZD Bronze Housing Bronze ABS Blades Matte White Glass



Matte Black Housing Matte Black ABS Blades $Matte\,White\,Glass$



Matte White Housing Matte White ABS Blades Matte White Glass

HAVEN OUTDOOR 52 LED





BLADES

(5) Blades (Included) 12° Blade Pitch 52" Blade Sweep

BLADE MATERIAL

ABS

LAMPING

Downlight: (2) 9W LED Bulbs Light Output: 1600 Lumens Net CCT: 3000K

CRI: 90+

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS

Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) See Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 19.2" B. Blade Drop: 11.7"

C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE	
ELECTRICITY	59 Watts	36 Watts	
AIRFLOW	4510 CFM	3228 CFM	
ENERGY COSTS	N/A	\$10 Per Year	
EFFICIENCY	77 CFM/Watt	90 CFM/Watt	

HAVEN OUTDOOR 52



5HVO52RZW Matte White Housing Matte White ABS Blades



5HVO52BK Matte Black Housing Matte Black ABS Blades

HAVEN OUTDOOR 52



BLADES

(5) Blades (Included)

12° Blade Pitch

52" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9"

B. Blade Drop: 11.7"

C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	59 Watts	36 Watts
AIRFLOW	4482 CFM	3206 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	76 CFM/Watt	89 CFM/Watt

HAVEN OUTDOOR 44



5HVO44BK Matte Black Housing Matte Black ABS Blades

5HVO44BZ

Bronze Housing Bronze ABS Blades



Matte White Housing Matte White ABS Blades

HAVEN OUTDOOR 44

WET

BLADES

(5) Blades (Included)

12° Blade Pitch

44" Blade Sweep

BLADE MATERIAL

ABS

MOUNTING

Maximum Slope Angle with Included Hardware: 30°

INCLUDED CONTROLS


Pull Chain Operation, 3-speed, Manual Reverse Switch



COMPATIBLE ACCESSORIES

Slope Ceiling Canopy Kits MC95 & MC93 (pg. 229) Light Kit Adaptable (pg. 220) See Control Compatibility Chart (pg. 218)

FAN SPECIFICATIONS



A. Fixture Drop: 13.9"

B. Blade Drop: 11.7"

C. Housing Width: 10.3"

D. Downrod: 4.5" (additional lengths pg. 236)

Motor Size: 153mm x 15mm

STANDARD	HIGHSPEED	WEIGHTED AVERAGE
ELECTRICITY	58 Watts	36 Watts
AIRFLOW	4025 CFM	2900 CFM
ENERGY COSTS	N/A	\$10 Per Year
EFFICIENCY	69 CFM/Watt	81 CFM/Watt



ACCESSORIES

Fan Controls 209
Light Kits 220
Custom Finish Kits 224
Finishing Caps 227
Mounting Canopies 228



NEO REMOTE CONTROLS

The NEO remote control is complete with both a magnet and a wall holster. It can fit anywhere in the home for easy access, and with its sleek profile, it complements any décor.

UNIVERSAL CAPABILITY

MCRC1 works with virtually all Monte Carlo pull-chain fans. The receiver is installed into the canopy of most standard, non-remote 3-speed fans.

HAND-HELD OR WALL-MOUNTED HOLSTER

Transmitter operates all functions while in the wireless, low-profile wall holster. The holster fits over standard switch plates, or can be mounted elsewhere.

MAGNETIZED TRANSMITTER

Attaches to metal surfaces for easy access.

SPEED CONTROL WITH LED SPEED INDICATOR

Single-button speed control with blue speed-indicator lights.

FOUR SPEEDS

Low, low/medium, medium/high and high speeds.

CONTROL CFL, INCANDESCENT OR LED

On/Off or dimming capability via dip switch on receiver.

60,000+ FREQUENCIES

Good for any large hotel, condo or apartment projects to eliminate frequency interference.

BATTERY OPERATED HAND-HELD TRANSMITTER

Transmitter includes an extra battery in the box.

2,000W SURGE PROTECTION

Twice the industry standard of 1000W.

WIRED WALL REMOTE CONTROL MCRC3 AVAILABLE

Ultimate control, with wired and hand-held controls able to work in concert.

NEO Functionality Chart

Complete System (Transmitter and Receiver)

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1	X	X		X	MCRC1
MCRC3	X	X		X	MCRC3

Transmitter Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC1T	X	X		X	MCRC1T
MCRC3W	Х	Х		X	MCRC3W

Receiver Only

MODEL/SERIES	FAN SPEED	FAN OFF	REVERSE	DOWNLIGHT	ITEM#
MCRC-RC1	X	X		X	MCRC-RC1

NEO MAGNETIC HAND-HELD & WALL MOUNT Battery Operated | Hard Wired



MCRC1 (Universal)

- Hand-held or wall mount
- Works with virtually all pull-chain fans
- Non-reversing fan and light control
- Canopy installed receiver
- Can be used with MCRC3





(Transmitter)

(Receive

TRANSMITTER AND FAN RECEIVER MCRC1

TRANSMITTER ONLY MCRC1T



MCRC3 (Universal)

- 2-wire wall control
- Works with virtually all pull-chain fans
- Non-reversing fan and light control
- Canopy installed receiver
- Includes white and almond face plates
- Can be used with MCRC1





(Transmitter)

(Receiver

TRANSMITTER AND FAN RECEIVER MCRC3

TRANSMITTER ONLY MCRC3W

COMPATIBLE FANS WITH MCRC1 AND MCRC3

Arcade 54	pg.100	Haven 52 LED2	pg.178
Centro 44	pg.146	Haven 52	pg.182
Colony Collection	pg.166	Haven Outdoor 52 LED	pg.200
Cruise 52	pg.198	Haven Outdoor 52	pg.202
Cyclone 60	pg.192	Haven Outdoor 44	pg.204
Discus Classic 52	pg.150	Jovie 52 LED	pg. 76
Discus Classic 44	pg.152	Jovie 52	pg. 78
Discus Ornate 52	pg. 174	Jovie 44 LED	pg. 80
Discus Outdoor 52	pg.194	Jovie 44	pg. 82
Era 44	pg. 88	Syrus 52	pg. 84
Era 52	pg. 86	Traverse 52	pg.158
Haven 52 LED3	pg.180		

COMBO WALL-MOUNT, HAND-HELD WALL CONTROL



CK250 (Combo Wall-Mount/Hand-Held Kit)

- Non-reversing fan and dimming downlight control
- Canopy installed receiver
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included







for Hand-Held Use)

TRANSMITTER ONLY CT100 (does not reverse fan)



CK300 (Combo Wall-Mount/Hand-Held Kit)

- Reversing fan and dimming downlight control
- Switch housing installed receiver
- Battery-operated hand-held transmitter or wall control (no hardwiring required)
- Dip switch control offering 16 different frequencies
- 1,000W surge protection
- White and almond face plates included



(Transmitter)





TRANSMITTER ONLY CT150

COMPATIBLE FANS WITH CK250

Arcade 54	pg.100	Haven 52 LED2	pg.178
Centro 44	pg.146	Haven 52	pg.182
Colony Collection	pg.166	Haven Outdoor 52 LED	pg.200
Cruise 52	pg.198	Haven Outdoor 52	pg.202
Cyclone 60	pg.192	Haven Outdoor 44	pg.204
Discus Classic 52	pg.150	Jovie 52 LED	pg. 76
Discus Classic 44	pg.152	Jovie 52	pg. 78
Discus Ornate 52	pg. 174	Jovie 44 LED	pg. 80
Discus Outdoor 52	pg.194	Jovie 44	pg. 82
Era 44	pg. 88	Syrus 52	pg. 84
Era 52	pg. 86	Traverse 52	pg.158
Haven 52 LED3	pg.180		

COMPATIBLE FANS WITH CK300

Cruise 52	pg.198
Cyclone 60	pg.192

WALL-MOUNT CONTROLS



ESWC-1 (Wall Control)

- Rotary-style fan wall control
- 3-speed
- Includes ivory and white knobs
- Face plate not included



ESSWC-3-WH (Wall Control)

 Converts standard two-wire wall switch to a four-speed (High, Medium/High, Medium, Low) fan control

COMPATIBLE FANS WITH ESWC-1 & ESSWC3-WH

Arcade 54	pg.100
Centro 44	pg.146
Colony 60	pg.168
Colony 52	pg.172
Cruise 52	pg.198
Haven 52	pg.182
Haven Outdoor 52	pg.202
Haven Outdoor 44	pg.204

WALL-MOUNT CONTROLS



ESSWC-4-WH (Wall Control)

- For use with extra heavy duty 212mm motors
- Converts standard two-wire wall switch to a heavy duty (212mm motor fans) four-speed (high, medium/high, medium, low) fan control



ESSWC-5-WH (Wall Control)

- Converts standard wall switch to fan and on/off light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately

COMPATIBLE FAN WITH ESSWC-4-WH

Cyclone 60

pg.192

COMPATIBLE FANS WITH ESSWC-5-WH

Arcade 54 Avila 54 Avila 54 Coastal Centro 44 Colony 60 LED Colony 60 Colony 52 LED Colony 52 Cruise 52 Discus Classic 52 Discus Classic 44 Discus Ornate 52	pg.100 pg.108 pg.190 pg.146 pg.166 pg.168 pg.170 pg.172 pg.198 pg.150 pg.152 pg.152	Era 52 Era 44 Haven 52 LED 3 Haven 52 LED 2 Haven 52 Haven Outdoor 52 LED Haven Outdoor 52 Haven Outdoor 44 Ikon 52 Ikon 44 Lowden 52 Syrus 52	pg. 86 pg. 88 pg.180 pg.178 pg.182 pg.200 pg.202 pg.204 pg.154 pg.156 pg.106 pg. 84
Discus Ornate 52 Discus Outdoor 52	pg. 174 pg. 194	Syrus 52 Traverse 52	pg. 84 pg.158

WALL-MOUNT CONTROLS



ESSWC-6-WH (Wall Control)

- 4-speed wall control
- Converts standard wall switch to a multi-function fan and light control
- Wall switch must have three wires, (with two hot leads) to operate both fan and light separately



ESSWC-7-WH (Wall Control)

- 6-speed wall transmitter
- 2-wire wall control
- Reversing fan and light control
- LED light dimmer

COMPATIBLE FANS WITH ESSWC-6

Arcade 54	pg.100	Era 52	pg. 86
Avila 54	pg.108	Era 44	pg. 88
Avila 54 Coastal	pg.190	Haven 52 LED 3	pg.180
Centro 44	pg.146	Haven 52 LED 2	pg.178
Colony 60 LED	pg.166	Haven 52	pg.182
Colony 60	pg.168	Haven Outdoor 52 LED	pg.200
Colony 52 LED	pg.170	Haven Outdoor 52	pg.202
Colony 52	pg.172	Haven Outdoor 44	pg.204
Cruise 52	pg.198	Ikon 52	pg.154
Discus Classic 52	pg.150	Ikon 44	pg.156
Discus Classic 44	pg.152	Lowden 52	pg.106
Discus Ornate 52	pg. 174	Syrus 52	pg. 84
Discus Outdoor 52	pg.194	Traverse 52	pg.158

COMPATIBLE FANS WITH ESSWC-7-WH

Adler 60	pg. 64
Maverick Coastal 60	pg.186
Maverick 88	pg. 20
Maverick 70	pg. 24
Maverick 60	pg. 28
Maverick 52	pg. 32
Minimalist 72	pg. 36
Minimalist 56	pg. 38



ESSWC-8 (Wall Control)

- 6-speed wall transmitter
- Battery operated
- On/off switch for fan powerReversing fan and light controlLED light dimmer



ESSWC-9 (Wall Control)

- 4-speed wall transmitter (1 = low speed, 2 = medium low speed, 3 = medium speed, 4 = high speed)
- Battery operated
- On/off switch for fan powerReversing fan and light control
- LED light dimmer

COMPATIBLE FANS WITH ESSWC-8

Adler 60	pg. 64	Maverick 60 LED	pg. 26
Kingston 72	pg.102	Maverick 60	pg. 28
Maverick Coastal 60	pg.186	Maverick 52 LED	pg. 30
Maverick 88	pg. 20	Maverick 52	pg. 32
Maverick 70 LED	pg. 22	Minimalist 72	pg. 36
Maverick 70	pg. 24	Minimalist 56	pg. 38

COMPATIBLE FANS WITH ESSWC-9

Akova 56	pg. 96	Lily 56	pg. 114
Armstrong 60	pg. 66	Loft 96	pg. 42
Aspen 70	pg.126	Loft 72	pg. 44
Aspen 56	pg.128	Loft 62	pg. 46
Avvo 56	pg. 90	Prairie 72	pg.120
Cirque 56	pg. 62	Prairie 62	pg.122
Destin 57	pg. 94	Prairie 52	pg.124
Launceton 56	pg.138	Stockton 60	pg. 40

WALL-MOUNT CONTROLS



ESSWC-10 (Wall Control)

- 6-speed wall transmitter
- Reversing fan and light control
- LED light dimmer



ESSWC-11 (Wall Control)

- 3-speed wall transmitter
- Reversing fan and light control
- LED light dimmer
- Variable Breeze

COMPATIBLE FANS WITH ESSWC-10

Arcade 68	pg. 98	Vision 72	pg. 50
Arezzo 60	pg.164	Jovie 58	pg. 74
Atlantic 56	pg. 92	Jovie 58 LED	pg. 72
Dover 68	pg.142	Subway 56	pg.136
Dover 60	pg.144	Rozzen 44	pg. 70
Giarre 60	pg.162	Rozzen 52	pg. 68
Metrograph 56	pg.140		

COMPATIBLE FANS WITH ESSWC-11

Haven 52 DC LED pg. 176 Haven 52 DC pg. 177

SMART CONTROL



MCSMRC (Smart AC Control)

- Hand-held or wall mount
- Converts non-Smart fans into Smart fans
- Works with virtually all AC motor fans
- Non-reversing fan and light controlCanopy installed receiver
- 4 Speeds

COMPATIBLE FANS WITH MCSMRC

Arcade 54 Centro 44 Colony Collection Cruise 52 Cyclone 60 Discus Classic 52	pg.100 pg.146 pg.166 pg.198 pg.168 pg.150	Discus Outdoor 52 Era 44 Era 52 Haven 52 LED3 Haven 52 LED2 Haven 52	pg.194 pg. 88 pg. 86 pg.180 pg.178 pg.182	Haven Outdoor 44 Jovie 44 Jovie 44 LED Jovie 52 Jovie 52 LED Syrus 52	pg.204 pg. 82 pg. 80 pg. 78 pg. 76 pg. 84
Discus Classic 52 Discus Classic 44	pg.150 pg.152	Haven 52 Haven Outdoor 52 LED	pg.182 pg.200		
Discus Ornate 52	pg. 174	Haven Outdoor 52	pg.202		

NEO REMOTE CONTROL KIT

NEO TRANSMITTER ONLY

COMBO HAND-HELD/ WALL REMOTE KIT

	MCRC1 MCRC3
Arcade 54	х
Centro 44	x
Colony 60 LED	x
Colony 60	x
Colony 52 LED	x
Colony 52	х
Cruise 52	x
Cyclone 60	х
Discus Classic 52	х
Discus Classic 44	×
Discus Ornate 52	x
Discus Outdoor 52	×
Era 44	×
Era 52	х
Haven 52 LED 3	×
Haven 52 LED 2	×
Haven Outdoor 52 LED	×
Haven 52	×
Haven Outdoor 52	×
Haven Outdoor 44	×
Jovie 44	×
Jovie 44 LED	х
Jovie 52	х
Jovie 52 LED	х
Syrus 52	х
Traverse 52	x

ONLY
MCRC1T MCRC3W
х
x
х
х
x
х
х
х
x
х
х
×
×
х
х
х
х
х
x
×
х
×
×
×
x
×

WALLKLINGTERIT								
CK250	СК300							
Х								
Х								
х								
х								
х								
х								
х	х							
х	х							
х								
х								
х								
х								
х								
х								
Х								
Х								
Х								
Х								
Х								
Х								
Х								
Х								
Х								
х								
х								
х								

DIRECT WIRED WALL CONTROLS

	ESWC-1	ESSWC-3-WH	ESSWC-4-WH	ESSWC-5-WH	ESSWC-6-WH
Arcade 54	Х	Х		х	х
Centro 44	х	х		Х	х
Colony 60 LED				х	х
Colony 60	х	x		х	x
Colony 52 LED				х	х
Colony 52	х	x		x	х
Cruise 52	x	x		x	х
Cyclone 60			x		
Discus Classic 52				x	х
Discus Classic 44				x	х
Discus Ornate 52				x	х
Discus Outdoor 52				x	х
Era 44				x	х
Era 52				х	х
Haven 52 LED 3				х	х
Haven 52 LED 2				х	х
Haven Outdoor 52 LED	х	х		х	х
Haven 52	х	х		х	х
Haven Outdoor 52 LED				х	х
Haven Outdoor 44	х	х		x	х
Ikon 44				х	х
Ikon 52				х	х
Syrus 52	х	х		х	х
Traverse 52				х	х

Can't find the fan you are looking for?

This means it is offered with its own remote control, included in the box. For remote control details, please check the fan's product page. All remote controls are indoor rated only.

These light kits are compatible with all Monte Carlo Fans that accomodate Light Kits



MC260

MC260 LED LIGHT KIT

- H: 1.2" W: 5.1"
- 18W Integrated LED
- 3000K | 1600 Lumens Net | CRI 90+
- Frosted White Shade

MC260MBK

Midnight Black

MC260PN

Polished Nickel

MC260RZW

Matte White

MC260BS

Brushed Steel (shown)



MC261

MC261 LED

LIGHT KIT

- H: 2.6" W: 11.2"
- 21W Integrated LED
- 3000K | 1800 Lumens Net | CRI 90+
- Frosted White Shade

MC261BS

Brushed Steel

MC2610Z

Oil Rubbed Bronze

MC261RZW

Matte White

MC261AGP

Aged Pewter (shown)

MC264 LED WET T24

LIGHTKIT

- H: 2.75" D: 7"
- (1) 18W Integrated LED2700K | 700 Lumens Net | CRI 90+
- Frosted Acrylic Lens

MC264AGP

Aged Pewter

MC264BK

Midnight Black

MC264RZW

Matte White (Shown)



MC264RZW

MC265 LED DAMP T24

LIGHTKIT

- H:1.875" D:8.25"
- 18W Integrated LED
- 2700K | 700 Lumens Net | CRI 90+
- Frosted Acrylic Lens

MC265AGP

Aged Pewter

MC265BK

Matte Black

MC265BS

Brushed Steel

MC265RZW

Matte White (Shown)



MC265RZW

MC266 WET T24

LIGHTKIT

- H: 3.625" D: 11.625"
- (2) 9W Medium A19 LED Bulbs (Included)
- xxxK | 800 Lumens Net | CRI xxx+
- Matte White Glass

MC266BK

Matte Black

MC266RB

Roman Bronze

MC266RZW Matte White

MC266OZ

Oil Rubbed Bronze (Shown)



MC266OZ

These light kits are compatible with the following collections:

Colony 60 & 52 Cyclone 60 Centro 44 Cruise 52 Dover 68 & 60

Haven 52 Haven Outdoor 52 & 44



MC224 ED

HUGGER LIGHT FROSTED GLASS

- H: 4.5" W: 12.4"
- (3) Candelabra 6W LED Bulb (Included)
- 2700K | 1500 Lumens Net | CRI 90+

MC224BS-V1

Brushed Steel (shown)

MC224RB-V1

Roman Bronze

MC224RZW-V1

Matte White



MC242 LED DAMP

MATTE OPAL GLASS

- H: 4.9" W: 11.75"
- (2) 9.3W Medium A19 LED Bulbs (Included)
- 3000K | 1600 Lumens Net | CRI 90+

MC242AGP

Aged Pewter

MC242BS

Brushed Steel

MC2420Z

MC242RB

Roman Bronze (shown)

MC242RZW Matte White

Oil Rubbed Bronze



MC247 LED DAMP

MATTE OPAL GLASS

- H: 3.8" W: 15.7"
- (3) 9.3W Medium A19 LED Bulbs (Included)
- 3000K | 2400 Lumens Net | CRI 90+

MC247RZW

Matte White

MC247RB

Roman Bronze

MC247BS

Brushed Steel (shown)

These light kits are compatible with the Aspen 70 and Aspen 56 collections.

MC263 LED

ASPEN LIGHT KIT

- H: 2.5" W: 3.9"
- 15W Integrated LED
- 3000K | 1500 Lumens Net | CRI 90+

MC263MBK Midnight Black MC263BBS Burnished Brass

MC263BS Brushed Steel

(shown)

MC263AGP Aged Pewter

MC263RZW Matte White MC263PN Polished Nickel



MC263BS

This light kit is compatible with the Rozzen 52 and Rozzen 44 collections.

MC262 ROZZEN LED LIGHT KIT

- H: 2.1" W: 6.25"
- 18W Integrated LED
- 3000K | 1500 Lumens Net | CRI 90+





MC262

The below Maverick Finish Kits can be added to the Maverick 70, 60, & 52 to create a custom look.*



*For Maverick 88 use part number 88MCFK-BK, 88MCFK-BBS, 88MCFK-RZW, 88MCFK-AGP, 88MCFK-BS, 88MCFK-PN.

The below Maverick LED Finish Kits can be added to the Maverick LED 70, 60, & 52 to create a custom look.





MCFKLED-AGP
Maverick Finish Kit in Aged Pewter



MCFKLED-BBS

Maverick Finish Kit in Burnished Brass



MCFKLED-BS

Maverick Finish Kit in Brushed Steel



Note: BBS maximum downrod length of 36".

MCFKLED-RZW

Maverick Finish Kit in Matte White



MCFKLED-PN

Maverick Finish Kit in Polished Nickel



The below Arcade Finish Kits can be added to the Arcade 68 & 54 to create a custom look.

ACFK-MBK Arcade Kit in Midnight Black



ACFK-PN
Arcade Finish Kit in Polished Nickel



ACFK-BBS
Arcade Finish Kit in Burnished Brass



Note: BBS maximum downrod length of 36".

ACFK-BS Arcade Finish Kit in Brushed Steel



ACFK-RZW Arcade Finish Kit in Matte White



MC360



MC360RB Roman Bronze

Finishing Cap (Blanking Plate) Exclusive for Discus Classic, Discus Ornate, Discus Outdoor, Discus Smart fans.



MC360AGP Aged Pewter



MC360BS Brushed Steel



MC360BK Matte Black



MC360RB Roman Bronze



MC360RZW Matte White

MCM360



MCM360BS Brushed Steel

Finishing Cap (Blanking Plate) Exclusive for Minimalist and Minimalist Max fans.



MCM360AGP Aged Pewter



MCM360BK Matte Black



MCM360BS Brushed Steel

MC362



MCM362MBK Midnight Black

Finishing Cap (Blanking Plate) Exclusive for Era fans.



MC362AGP Aged Pewter



MC362BS Brushed Steel



MC362MBK Midnight Black



MC362RZW Matte White

MC90 (Flush Mount Canopy Kit)



MC90RB Roman Bronze

For lower ceilings, this flush mount canopy can easily be mounted directly on the top of most Monte Carlo models (under 35 lbs), bringing your fan closer to the ceiling.



MC90AGP Aged Pewter



MC90BS Brushed Steel

MC90RB

Roman Bronze



мс90ВК

Matte Black

MC900Z Oil Rubbed Bronze



MC90TI Titanium



MC90BP Brushed Pewter



MC90PN Polished Nickel



MC90WH White

MCM95 Slope Ceiling Canopy Kit Exclusive for Minimalist and Minimalist Max fans.



MCM95AGP Aged Pewter

For sloped or vaulted ceilings (up to 25° pitch), this adapter can easily be mounted on the Minimalist or Minimalist Max fans.



MCM95AGP Aged Pewter



MCM95BS Brushed Steel



MCM95BK Matte Black

MC93 (Slope Ceiling Canopy Kit)



MC93RB Roman Bronze

For extreme sloped or vaulted ceilings (up to 46° pitch) this adapter can easily be mounted on most Monte Carlo models under 35 lbs.



MC93AGB Aged Bronze



MC93AGP Aged Pewter



MC93BBS Burnished Brass



MC93BK Matte Black



MC93BNZ Deep Bronze



MC93BP Brushed Pewter



MC93BS Brushed Steel



MC93BZ Bronze



MC93CH Chrome



MC93DWZ Dark Weathered Zinc



MC93KOA MC93MBK Koa Midnight Black



BK MC93OZ lack Oil Rubbed Bronze



3OZ MC93PN bbed Polished Nickel



MC93RB Roman Bronze



MC93RZW Matte White



MC93SN Satin Nickel



MC93WH White



MC95WGR Washed Grey

MC95 (Slope Ceiling Canopy Kit)



MC95RB Roman Bronze

For extreme sloped or vaulted ceilings (up to 46° pitch) this adapter can easily be mounted on most Monte Carlo models under 35 lbs.



MC95AGB Aged Bronze



MC95AGP Aged Pewter



MC95BBS Burnished Brass



MC95BK Matte Black



MC95BP Brushed Pewter



MC95BS Brushed Steel



MC95CH Chrome



MC95BZ Bronze



MC95GRY Grey



MC95KOA Koa



MC95BNZ Deep Bronze



MC95OZ Oil Rubbed Bronze



MC95PN Polished Nickel



MC95RB Roman Bronze



MC95RZW Matte White



MC95SN Satin Nickel



MC95TI Titanium



MC95WH White



RESOURCES


Ceiling Fan Tips	232
Blade Finishes	234
Housing Finishes	235
Downrod Options	236
Product Specifications	238
Item Number Index	242
Collection Index	245

CEILING FAN TIPS

The right fan starts with knowing the fan's environment for maximum airflow. Monte Carlo's expertise in design and engineering provides ceiling fan and mounting options for every room.


Selecting The Right Size Fan


When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, consider using two smaller fans.

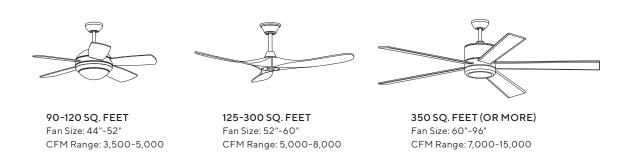

Seasonal Settings


We recommend that you adjust your fan with the change of the seasons to ensure maximum comfort. Simply flip the switch on the fan housing or press the reverse button on your fan control.






Mounting Options

When choosing a ceiling fan for your space, you'll want at least 18" to 24" of clearance on all sides. In large spaces, another option can be to go with two smaller fans.

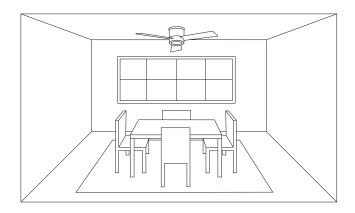


FLUSH MOUNT/HUGGER FANS

This type of mount is recommended for 8' ceilings. By eliminating the downrod, the Hugger option saves 4"-6" in length between the fan's motor housing and the ceiling. The National Electric Code requires that all fan blades be a minimum of 7' above the floor. Many Monte Carlo fans include a dual mount canopy.




CLOSE-TO-CEILING FANS

For 8'-10' ceilings, a downrod from 4"-8" is installed between the ceiling canopy and the fan. Installing the blades further away from the ceiling allows for more air circulation and fan efficiency. Allow a minimum of 7' clearance from the floor to the lowest point on the fan blade.

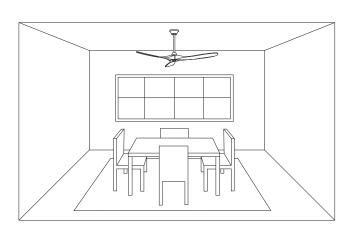

EXTENDED DOWNROD FANS


For ceilings 10' and above, such as great rooms, lofts, and expansive entryways, a longer downrod is recommended. We offer downrod lengths of 12", 18", 24", 36", 48", 60" and 72". See page 236 for more information on downrods.




SLOPED CEILINGS

For ceilings pitched 25° - 45° , a sloped ceiling canopy must be installed instead of the standard fan canopy—allowing the fan to hang straight. Monte Carlo offers slope canopy kits in a variety of finishes, see page 229 for more information.

BLADE FINISHES

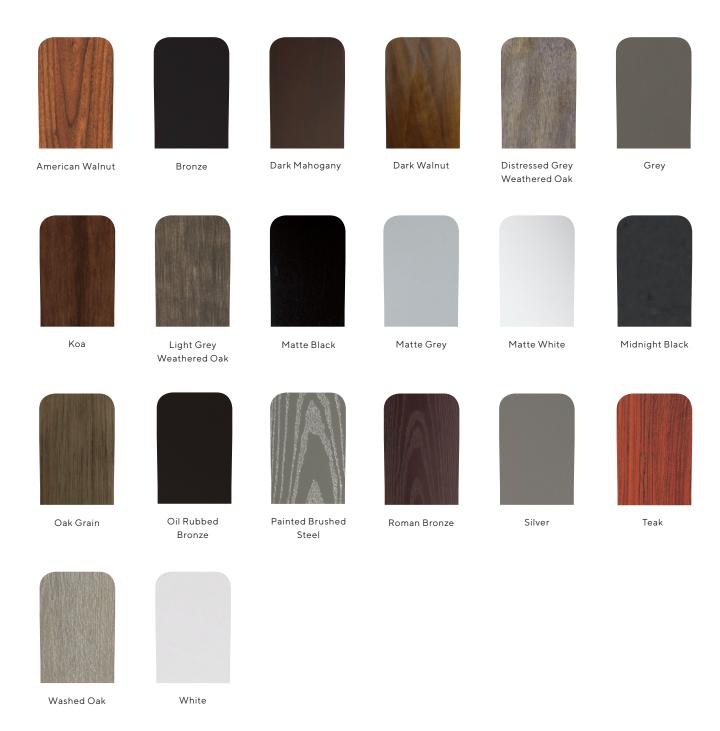

HOUSING FINISHES

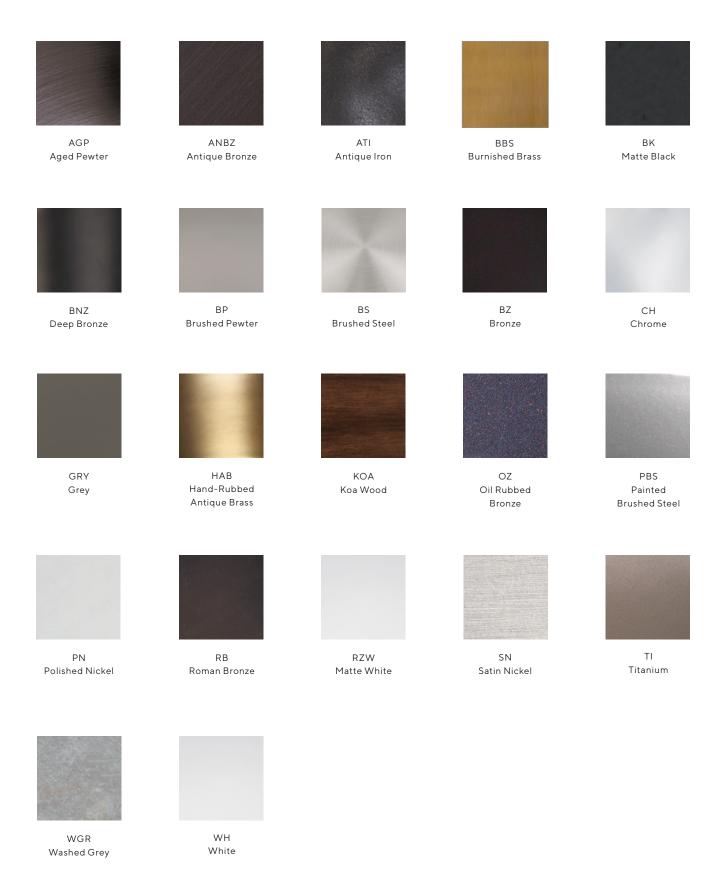

Our decorative downrods have pre-drilled holes on both ends. For optimum performance, we recommend that your ceiling fan be installed with the blades suspended 7' to 9' above the floor.

Standard 1/2" Diameter Downrods

Ceiling Height	9 FT	10 FT	11 FT	12 FT	13 FT	14 FT	15 FT
Suggested Downrod Length	12 IN	18 IN	24 IN	36 IN	48 IN	60 IN	72 IN
Aged Brass	DR12AGB	DR18AGB	DR24AGB	DR36AGB	N/A	N/A	N/A
Aged Pewter	DR12AGP	DR18AGP	DR24AGP	DR36AGP	DR48AGP	DR60AGP	DR72AGP
Bronze	DR12BZ	DR18BZ	DR24BZ	DR36BZ	DR48BZ	DR60BZ	DR72BZ
Brushed Pewter	DR12BP	DR18BP	DR24BP	DR36BP	DR48BP	DR60BP	DR72BP
Brushed Steel	DR12BS	DR18BS	DR24BS	DR36BS	DR48BS	DR60BS	DR72BS
Burnished Brass	DR12BBS	DR18BBS	DR24BBS	DR36BBS	N/A	N/A	N/A
Chrome	DR12CH	DR18CH	DR24CH	DR36CH	DR48CH	DR60CH	DR72CH
Dark Weathered Zinc	DR12DWZ	DR18DWZ	DR24DWZ	DR36DWZ	DR48DWZ	DR60DWZ	DR72DWZ
Deep Bronze	DR12BNZ	DR18BNZ	DR24BNZ	DR36BNZ	N/A	N/A	N/A
Grey	DR12GRY	DR18GRY	DR24GRY	DR36GRY	N/A	N/A	N/A
Hand Rubbed Antique Brass	DR12HAB	DR18HAB	DR24HAB	DR36HAB	N/A	N/A	N/A
Коа	DR12KOA	DR18KOA	DR24KOA	DR36KOA	DR48KOA	DR60KOA	DR72KOA
Matte Black	DR12BK	DR18BK	DR24BK	DR36BK	DR48BK	DR60BK	DR72BK
Matte White	DR12RZW	DR18RZW	DR24RZW	DR36RZW	DR48RZW	DR60RZW	DR72RZW
Midnight Black	DR12MBK	DR18MBK	DR24MBK	DR36MBK	DR48MBK	DR60MBK	DR72MBK
Oil Rubbed Bronze	DR12OZ	DR18OZ	DR24OZ	DR36OZ	DR48OZ	DR60OZ	DR72OZ
Polished Nickel	DR12PN	DR18PN	DR24PN	DR36PN	DR48PN	DR60PN	DR72PN
Roman Bronze	DR12RB	DR18RB	DR24RB	DR36RB	DR48RB	DR60RB	DR72RB
Satin Nickel	DR12SN	DR18SN	DR24SN	DR36SN	DR48SN	DR60SN	DR72SN
Titanium	DR12TI	DR18TI	DR24TI	DR36TI	DR48TI	DR60TI	N/A
Washed Grey	DR12WGR	DR18WGR	DR24WGR	DR36WGR	DR48WGR	DR60WGR	DR72WGR
White	DR12WH	DR18WH	DR24WH	DR36WH	DR48WH	DR60WH	DR72WH

Ceiling Height	9 FT	10 FT	11 FT	12 FT	13 FT	14 FT	15 FT		
Suggested Downrod Length	12 IN	18 IN	24 IN	36 IN	48 IN	60 IN	72 IN		
Antique Fan 3/4" Diameter Downrods for use with Arezzo and Giarre only.									
Antique Iron	DRA12ATI	DRA18ATI	DRA24ATI	DRA36ATI	DRA48ATI	DRA60ATI	DRA72ATI		
For use with Coastal fans.									
Matte White	DRC12RZW	DRC18RZW	DRC24RZW	DRC36RZW	DRC48RZW	DRC60RZW	DRC72RZW		
Midnight Black	DRC12MBK	DRC18MBK	DRC24MBK	DRC36MBK	DRC48MBK	DRC60MBK	DRC72MBK		
For use with Minimalist 56 and 1	Minimalist 72 Far	ns only.				,			
Aged Pewter	DRM12AGP	DRM18AGP	DRM24AGP	DRM36AGP	DRM48AGP	N/A	N/A		
Bronze	DRM12BZ	N/A	DRM24BZ	DRM36BZ	DRM48BZ	N/A	N/A		
Matte Black	DRM12BK	N/A	DRM24BK	DRM36BK	DRM48BK	N/A	N/A		

Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Adler 60	64	60	3	V	12.5	8.5	15°	85	28	DC	Damp	YES
Akova 56	96	56	3	17°	14.4	8	20°	125	20	DC	Damp	YES
Alba 60	48	60	3	18°	15.1	8	20°	155	22	DC	Damp	YES
Arcade 68	98	68	3	10°	15	8.5	20°	178	22	DC		YES
Arcade 54	100	54	3	10°	15	8.5	20°	153	18	AC		
Arezzo 60	164	60	3	24°	17.5	8	0°	178	12	DC		YES
Armstrong 60	66	60	3	16°	14.1	8	20°	125	20	DC	Damp	YES
Aspen 70	126	70	3	12°	13.1	8	20°	120	25	DC	Damp	YES
Aspen 56	128	56	5	13°	13.1	8	20°	120	25	DC	Damp	YES
Atlantic 56	92	56	5	14°	17.8	8	20°	178	12	DC		YES
Avila 54	108	54	3	10°	15.5	8.5	30°	153	18	AC	Damp	
Avila Coastal 54	190	54	3	21°	16.2	8.5	30°	153	18	AC	Wet	
Avvo 56	90	56	3	V	12.9	8	25°	120	25	DC	Damp	YES
Boynton 54	196	54	3	14°	19.8	8.5	30°	172	20	AC	Wet	
Bryden 60 Smart	132	60	3	18°	14.6	8	15°	125	30	DC	Damp	
Butterfly 54	116	54	4	15°	20	9	22°	153	22	AC	Damp	
Centro 44	146	44	5	14°	13.1	8	18°	153	15	AC		
Cirque 56	62	56	3	15°	13.5	8	20°	120	20	DC	Damp	YES
Clarity 56	58	56	3	12°	9.7	8	N/A	172	17	AC		
Clarity 52	60	52	3	12°	9.2	8	N/A	153	18	AC		
Clarity 42	61	42	3	12°	9.2	8	N/A	153	12	AC		
Collins Coastal 60Smart	188	60	3	18°	12.5	8.5	20°	155	22	DC	Wet	
Collins 60 Smart	34	60	3	18°	14.5	8.5	20°	125	30	DC	Damp	
Colony 60 LED	166	60	5	12°	18.5	8	30°	188	20	AC	Damp	
Colony 60	168	60	5	12°	18.5	8	30°	188	20	AC	Damp	
Colony 52 LED	170	52	5	12°	17.7	8	30°	153	18	AC	Damp	
Colony 52	172	52	5	12°	12.8	8	30°	153	18	AC	Damp	
Cruise 52	198	52	5	13°	14	8	30°	172	20	AC	Wet	
Cyclone 60	192	60	5	13°	14	8	30°	212	25	AC	Wet	
Destin 57	94	57	3	16°	13.7	8	20°	120	15	DC	Damp	YES
Discus 52 Smart	148	52	5	12°	15.1	8	30°	150	16	DC	Damp	YES
Discus Classic 52	150	52	5	12°	15.1	8	30°	153	18	AC		TES
Discus Classic 44	152	44	5	12°	15.1	8	30°	153	18	AC		
Discus Ornate 52	174	52	5	12°	15.1	8	30°	153	18	AC		
Discus Outdoor 52	194	52	5	12°	15.1	8	30°	153	18	AC	Wet	
Dover 68	142	68	5	14°	15.1	8.5	20°	178	22	DC	4461	YES
Dover 60	144	60	5	14°	15.8	8.5	20°	178	12	DC		YES
Era 52	86	52	3	13°	15.6	8	18°	153	18	AC	Damp	ILS
Era 44	88	44	3	13°	15	8	18°					
Giarre 60	162	60	4	30°	21.8	9	0°	153 155	18	AC DC	Damp	YES
Haven 52 DC LED	176		5	12°		8	30°	150				YES
Haven 52 DC LED	177	52 52	5	12°	18.3	8	30°	150	16	DC DC		YES
			5	12°		8	30°					YES
Haven 52 LED3	180	52			19.9			153	12	AC		
Haven 52 LED2	178	52	5	12°	18.3	8	30°	153	12	AC		
Haven 52	182	52	5	12°	13.9	8	30°	153	12	AC	10/	
Haven Outdoor 52 LED	200	52	5	12°	19.2	8	30°	153	15	AC	Wet	
Haven Outdoor 52 Haven Outdoor 44	202	52 44	5	12°	13.9	8	30°	153 153	15 15	AC AC	Wet Wet	

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
29	5251	178	20	5764	6	290							
33	4515	133	21	3391	6	162							
35	6262	177	20	4467	6	220							
37	9289	248	24	5764	7	244							
62	6112	99	39	4534	11	115							
35	8286	235	18	5497	5	307							
33	7732	234	22	5356	6	243							
37	7270	195	24	4985	7	211							
30	7228	240	20	4981	6	249							
28	7531	268	19	4831	5	254							
***	***	***	38	3647	11	97							
58	4907	85	38	3647	11	97							
24	6461	269	12	3885	3	325							
65	5687	87	41	3929	11	97							
***	***	***	***	***	***	***							
64	4903	76	41	3297	11	81							
44	3252	74	30	2400	8	81	44	3068	70	30	2297	8	77
28	7103	252	19	5102	5	276							
64	4494	70	38	2753	11	73							
51	3682	73	36	2804	10	77							
39	2405	62	30	1870	8	63							
31	6816	217	***	***	***	***							
28	6884	246	22	5063	6	235							
72	5416	75	47	3963	13	84	72	4937	68	47	3356	13	71
72	5509	76	47	4096	13	87	72	4937	68	47	3633	13	77
58	4224	73	37	3164	10	85	58	2867	49	37	1900	10	51
58	4257	73	36	3475	10	97	56	2469	42	37	1748	10	47
67	4441	66	42	3238	12	76							
81	6708	83	52	4890	15	93							
27	5803	215	17	3928	5	225							
36	6263	174	25	4310	7	171							
65	4758	73	41	3415	11	83	65	3217	49	41	2164	12	53
58	3954	68	37	2854	10	77	58	3030	52	37	1970	10	53
65	4758	73	41	3415	11	83							
61	4470	74	39	3266	11	85							
38	9508	249	24	6313	7	264							
38	7988	212	23	5156	7	221							
***	***	***	***	***	***	***							
***	***	***	***	***	***	***							
33	8342	254	20	5824	6	284							
27	5682	210	18	4255	5	238	29	5284	184	19	3920	5	210
27	5579	208	18	4156	5	235	***	***	***	19	3940	5	209
60	4344	73	38	3225	11	85	60	4135	69	38	3039	11	80
60	4355	73	38	3241	11	86	60	4068	68	38	3020	11	80
60	4402	74	38	3241	11	86	60	4026	68	38	3013	11	80
59	4510	77	36	3228	10	90	59	4072	69	36	2956	10	82
59	4482	76	36	3206	10	89	59	4102	70	36	2956	10	82
58	4025	69	36	2900	10	81	58	3913	67	36	2740	10	77

Collection	Page Number	Fan Width (inches)	Number of Blades	Blade Pitch	Fan Height (inches)	Min Ceiling Height	Max Ceiling Slope with included hardware	Motor Diameter (mm)	Motor Height (mm)	AC or DC Motor	Wet / Damp Rated	ENERGY STAR Qualified
Hicks 60	130	60	3	13°	15.6	8.5	20°	178	22	DC		YES
Ikon 52	154	52	3	12°	10.8	8	N/A	153	18	AC		
Ikon 44	156	44	3	12°	10.8	8	N/A	153	12	AC		
Jovie 58	74	58	3	12°	13.5	8	20°	178	12	DC	Wet	
Jovie 58 LED	72	58	3	12°	14.7	8	20°	178	12	DC	Wet	
Jovie 52	78	52	3	12°	13.4	8	20°	153	15	AC	Damp	
Jovie 52 LED	76	52	3	12°	15.4	8	20°	153	15	AC	Damp	
Jovie 44	82	44	3	12°	13.5	8	20°	153	12	AC	Damp	
Jovie 44 LED	80	44	3	12°	15.4	8	20°	153	12	AC	Damp	
Kingston 72	102	72	8	V	17.3	8.5	15°	120	30	DC	Damp	YES
Launceton 56	138	56	4	16°	14	8	0°	120	20	DC	Damp	YES
Lily 56	114	56	5	14°	16.2	8.5	15°	120	25	DC	Damp	
Loft 96	42	96	6	13°	13	8	20°	125	25	DC	Damp	YES
Loft 72	44	72	6	13°	13	8	20°	125	25	DC	Damp	YES
Loft 62	46	62	6	13°	13	8	20°	125	25	DC	Damp	YES
Lowden 60 Smart	104	60	5	12°	14.9		30°	178	12	DC	Damp	
Lowden 52	106	52	5	12°	16	8.5	30°	153	20	AC	Damp	
Maverick Coastal 60	186	60	3	V	12	8	15°	120	30	DC	Wet	YES
Maverick 88	20	88	3	V	13.9	8.5	15°	120	25	DC	Damp	YES
Maverick 70 LED	22	70	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 70	24	70	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick 60 LED	26	60	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 60	28	60	3	V	11.7	8	15°	85	28	DC	Damp	YES
Maverick 52 LED	30	52	3	V	13.8	8.5	15°	85	28	DC	Damp	YES
Maverick 52	32	52	3	V	11.7	8	15°	85	28	DC	Damp	YES
Metrograph 56	140	56	4	13°	16.6	8.5	20°	178	12	DC		YES
Minimalist 72	36	72	3	V	13.7	8.5	6°	85	28	DC	Damp	YES
Minimalist 56	38	56	3	V	13.7	8.5	6°	85	25	DC	Damp	YES
Prairie 72	120	72	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Prairie 62	122	62	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Prairie 52	124	52	14	14°	14.1	8.5	20°	125	25	DC	Damp	YES
Rozzen 52	68	52	3	13°	12.6	8	20°	125	16	DC		YES
Rozzen 44	70	44	3	13°	12.6	8	20°	125	16	DC		YES
Ruhlmann 52 Smart	134	52	3	20°	14.5	8.5	30°	125	30	DC	Damp	
Stockton 60	40	60	3	V	13.1	8.5	20°	125	20	DC	Damp	YES
Streaming 60 Smart	110	60	3	15°	17.9	8.5	30°	155	22	DC	Damp	
Streaming 52 Smart	112	52	3	15°	17.9	8.5	30°	125	16	DC	Damp	
Subway 56	136	56	4	15°	16.1	8.5	20°	178	12	DC	Damp	
Syrus 52	84	52	3	13°	15.9	8	30°	153	18	AC		
Traverse 52	158	52	5	12°	12	8	N/A	153	18	AC		
Vision 72	50	72	5	12°	16.7	8.5	30°	178	22	DC		YES
Vision 56	52	56	3	12°	14	8	30°	172	20	AC	Damp	
Vision 52	54	52	3	12°	14.6	8.5	30°	153	18	AC		
Vision 42	56	42	3	12°	14.6	8.5	30°	153	12	AC		

PRODUCT SPECIFICATIONS

Energy Use at High (W)	Airflow at High (CFM)	Efficiency at High (CFM/W)	Energy Use Average (W) Standard	Airflow Average (CFM) Standard	Estimated Yearly Energy Cost (\$) Standard	Efficiency Average (CFM/W) Standard	Energy Use at High (W) Flush Mount	Airflow at High (CFM) Flush Mount	Efficiency at High (CFM/W) Flush Mount	Energy Use Average (W) Flush Mount	Airflow Average (CFM) Flush Mount	Estimated Yearly Energy Cost (\$) Flush Mount	Efficiency Average (CFM/W) Flush Mount
28	8752	317	18	5746	5	311							
							***	***	***	***	***	***	***
							***	***	***	***	***	***	***
***	***	***	***	***	***								
***	***	***	***	***	***								
62	5901	95	35	4128	10	117							
					8	102							
					0	102							
28	10213	367	20	7713	6	385							
28	6644	233	19	4744	5	248							
29	6727	234	19	4698	5	253							
33	13634	413	19	9682	10	500							
33	8378	252	19	5693	5	302							
22	6928	310	15	4993	4	327							
39	6729	173	24	4703	7	192							
	5229	83	38	3585	11	94							
27	8574	321	18	6195	5	341							
26	14784	575	15	10168	8	668							
22	7336	331	18	5943	5	337							
30	6821	229	21	5192	6	250							
34	7680	228	20	5365	6	269							
27	6687	246	20	4551	6	231							
30	6928	230	21	4707	6	229							
27	5889	217	18	3807	5	208							
32	6944	219	20	4833	5	247							
31	9468	302	22	6934	6	322							
27	7240	267	21	5089	6	246							
35	7128	204	21	5326	6	251							
34	7233	221	23	5003	6	221							
23	5003	197	16	3310	4	211							
21	5310	248	15	3712	4	241							
22	4644	211	16	3022	4	192							
32	7916	246	21	5685	6	271							
	7460	246	***	***	***	***							
30	5605	187	***	***	***	***							
62	5336	86	40	3944	11	99							
64	2327	36	41	1737	11	43							
33	10197	308	21	7512	6	353							
64	5252	82	37	3334	10	89							
43	3420	79	32	2685	9	83							
40	2190	55	29	1678	8	57							

 $[\]ensuremath{^{***}\mathsf{Testing}}$ data not available at press time.

INDEX

3ADR60AGP	65	3JVR44MBK	82	3MNLR72BKD	37
3ADR60BKBK	65	3JVR44MBKD	81	3RULSM52BSD	135
3ADR60BS	65	3JVR44RZW	83	3RULSM52HABD	135
3ADR60RZW	65	3JVR44RZWD	81	3RULSM52MBKD	135
3AKR56BKD	97	3JVR52AGP	79	3RULSM52RZWD	134
3AKR56RZWD	97	3JVR52AGPD	77	3RZR44AGP	70
3ALBR60MBKD	49	3JVR52BS	79	3RZR44BS	71
3ALBR60RZWD	49	3JVR52BSD	76	3RZR44MBK	71
3AMR60AGPD	67	3JVR52MBK	79	3RZR44RZW	71
3AMR60BSD	67	3JVR52MBKD	77	3RZR52AGP	69
3AMR60RZWD	67	3JVR52RZW	79	3RZR52BS	69
3AR54BS	101	3JVR52RZWD	77	3RZR52MBK	69
3AR54MBK	100	3JVR58AGP	75	3RZR52RZW	69
3AR54RZWBBS	101	3JVR58AGPD	72	3STMSM52BSD	113
3ARR68BS 3ARR68MBK	99 99	3JVR58BS 3JVR58BSD	75 73	3STMSM52MBKD 3STMSM52RZWD	113 113
3ARR68RZWBBS	99	3JVR58B5D 3JVR58MBK	73 75	3STMSM52KZWD 3STMSM60BSD	111
3AVLCR54MBKD	191	3JVR58MBKD	73	3STMSM60MBKD	110
3AVLCR54RZWD	191	3JVR58RZW	74	3STMSM60RZWD	111
3AVI R54AGPD	109	3JVR58RZWD	73	3STR60AGPD	41
3AVLR54BSD	109	3MAVR52AGP	33	3STR60RZWD	41
3AVLR54SBD	108	3MAVR52AGPD	30	3SY52BSD	84
3AVOR56KOAD-V1	90	3MAVR52BK	33	3SY52MBKD	85
3AVOR56RZWD-V1	91	3MAVR52BKBK	32	3SY52OZD	85
3BRYSM60BSD	133	3MAVR52BKBKD	30	3SY52RZWD	85
3BRYSM60HABD	133	3MAVR52BKD	31	3VNMR56BSLGD-V1	53
3BRYSM60MBKD	133	3MAVR52BS	33	3VNMR56RBD-V1	53
3BTR54ANBZD	197	3MAVR52BSD	31	3VNMR56RZWD-V1	53
3CLMR56BSD-V1	59	3MAVR52BSKOA	33	3VNR42BSD-V1	57
3CLMR56BSLGD-V1	59	3MAVR52BSKOAD	31	3VNR42BSLGD-V1	57
3CLMR56RZWD-V1	59	3MAVR52RZW	32	3VNR42OZD-V1	56
3CLNCSM60MBK	189	3MAVR52RZWBBS	32	3VNR42RZWD-V1	57
3CLNCSM60RZW	189	3MAVR52RZWD	31	3VNR52BSLGD-V1	55
3CLNSM60AGP	35	3MAVR60AGP	29	3VNR52OZD-V1	55
3CLNSM60BS	35	3MAVR60AGPD	27	3VNR52RZWD-V1	54
3CLNSM60MBK	34	3MAVR60BK	29	4BFR54BSD-V1	117
3CLYR42BSD-V1	61	3MAVR60BKBK	28	4LNCR56HAB	139
3CLYR42BSLGD-V1	61	3MAVR60BKBKD	26	4LNCR56MBK	139
3CLYR42OZD-V1	61	3MAVR60BKD	26	4SBWR56HAB	136
3CLYR42RZWD-V1	61 60	3MAVR60BS	29 27	4SBWR56MBK 4SBWR56PN	137
3CLYR52BSD-V1 3CLYR52BSLGD-V1	60	3MAVR60BSD 3MAVR60BSKOA	28	45BWR50PN 4TSR56BNZHABD	137 141
3CLYR52D3LGD V1	60	3MAVR60BSKOAD	27	5ASPR56AGP	128
3CLYR52RZWD-V1	60	3MAVR60RZW	29	5ASPR56BBS	128
3CQR56MBKD	63	3MAVR60RZWBBS	28	5ASPR56BS	129
3CQR56RZWD	63	3MAVR60RZWD	27	5ASPR56MBK	129
3DSTR57AGPD	95	3MAVR70AGP	25	5ASPR56PN	129
3DSTR57BSD	95	3MAVR70AGPD	23	5ASPR56RZW	129
3ERAR44AGPD	88	3MAVR70BK	25	5ASPR70AGP	126
3ERAR44BSD	89	3MAVR70BKBK	24	5ASPR70BBS	127
3ERAR44MBKD	89	3MAVR70BKBKD	22	5ASPR70BS	127
3ERAR44RZWD	89	3MAVR70BKD	22	5ASPR70MBK	127
3ERAR52AGP	87	3MAVR70BS	24	5ASPR70RZW	127
3ERAR52BSD	87	3MAVR70BSD	23	5ATR56HABD	93
3ERAR52MBKD	86	3MAVR70BSKOA	25	5ATR56MBKD	93
3ERAR52RZWD	87	3MAVR70BSKOAD	23	5ATR56PND	93
3HCKR60BNZHABD	131	3MAVR70RZW	25	5COM52AGP	173
3HCKR60HABD	131	3MAVR70RZWBBS	24	5COM52AGPD-V1	170
3IKR44AGPD	156	3MAVR70RZWD	23	5COM52BS	173
3IKR44BSD	157	3MAVR88AGP	21	5COM52BSD-V1	171
3IKR44MBKD	157 157	3MAVR88BK	20	5COM52MBK	173
3IKR44RZWD	157 155	3MAVR88BKBK	20	5COM52MBKD-V1	171
3IKR52AGPD 3IKR52BSD	155 157	3MAVR88BS 3MAVR88BSKOA	21 21	5COM52RB 5COM52RBD-V1	173 171
3IKR52BSD 3IKR52MBKD	154 155	3MAVR88BZW	21	5COM52RBD-VI 5COM52RZW	171
3IKR52RZWD	155	3MGMR60MBKMBK	187	5COM52RZWD-V1	173
3JVR44AGP	83	3MGMR60RZW	187	5CQM44AGP	147
3JVR44AGPD	81	3MNLR56AGPD-V1	39	5CQM44BS	147
3JVR44ABS	83	3MNLR56BKD-V1	39	5CQM44RB	147
3JVR44BSD	80	3MNLR72AGPD	36	5CQM44RZW	146
				•	

					11.
5CSM60AGP	169	5HVO52BZD	200	DR12RZW	236
5CSM60AGPD-V1	167	5HVO52RZW	202	DR12SN	236
5CSM60BS	169	5HVO52RZWD	201	DR12TI	236
5CSM60BSD-V1	167	5LLR56BSD-V1	115	DR12WGR	236
5CSM60MBK	169	5LLR56RZWD-V1	115	DR12WH	236
5CSM60MBKD-V1	167	5LWDR52AGPD	107	DR18AGB	236
5CSM60RB	169	5LWDR52BSD	107	DR18AGP	236
5CSM60RBD-V1	166	5LWDR52BSLGD	107	DR18BBS	236
5CSM60RZW	169	5LWDR52MBKD	107	DR18BK	236
5CSM60RZWD-V1	167	5LWDR52RZWD	107	DR18BNZ	236
5CU52BK	199	5LWDSM60AGPD	105	DR18BP	236
5CU52RB	199	5LWDSM60BSD	104	DR18BS	236
5CU52WH	199	5LWDSM60BSLGD	105	DR18BZ	236
5CY60BK	193	5LWDSM60MBKD	105	DR18CH	236
5CY60RB	193	5LWDSM60RZWD	105	DR18DWZ	236
5CY60WH	193	5TV52AGPD-V1	159	DR18GRY	236
5DIC44AGPD-V1	153	5TV52BSD-V1	159	DR18KOA	236
5DIC44BKD-V1	153	5TV52RBD-V1	159	DR18MBK	236
5DIC44BSD-V1	153	5TV52WHD-V1	159	DR18OZ	236
5DIC44PND-V1	152	5VMR72BSD	51	DR18PN	236
5DIC44RBD-V1	152	5VMR72OZD	50	DR18RB	236
5DIC44WHD-V1	153	5VMR72RZWD	51	DR18RZW	236
5DIC52AGPD-V1	151	6LFR62MBKD	47	DR18SN	236
5DIC52BKD-V1	151	6LFR62RZWBBSD	47	DR18TI	236
5DIC52BSD-V1	150	6LFR62RZWD	47	DR18WGR	236
5DIC52PND-V1	151	6LFR72MBKD	45	DR18WH	236
5DIC52RBD-V1	150	6LFR72RZWBBSD	45	DR24AGB	236
5DIC52WHD-V1	151	6LFR72RZWD	45	DR24AGP	236
5DIO52AGPD	175	6LFR96MBKD	43	DR24BBS	236
5DIO52BKD	175	6LFR96PBSD	43	DR24BK	236
5DIO52RBD	175	6LFR96RZWD	43	DR24BNZ	236
5DISM52AGPD	149	8KGR72BKD	103	DR24BP	236
5DISM52BSD	149	14PRR52AGPD	125	DR24BS	236
5DISM52MBKD	149	14PRR52BSD	125	DR24BZ	236
5DISM52RZWD	149	14PRR62AGPD	123	DR24CH	236
5DIW52BKD	195	14PRR62BSD	123	DR24DWZ	236
5DIW52PBSD	195	14PRR72AGPD	120	DR24GRY	236
5DIW52RBD	195	14PRR72BSD	121	DR24HAB	236
5DIW52WHD	194	88MCFK-AGP	224	DR24KOA	236
5DVR60AGP	145	88MCFK-BBS	224	DR24MBK	236
5DVR60BS	145	88MCFK-BK	224	DR24OZ	236
5DVR60OZ	145	88MCFK-BS	224	DR24PN	236
5DVR60RZW	145	88MCFK-PN	224	DR24RB	236
5DVR68OZ	142	88MCFK-RZW	224	DR24RZW	236
5DVR68RZW	143	ACFK-BBS	226	DR24SN	236
5HV52BK	182	ACFK-BS	226	DR24TI	236
5HV52BKD	178	ACFK-MBK	226	DR24WGR	236
5HV52BKF	180	ACFK-PN	226	DR24WH	236
5HV52BPD	179	ACFK-RZW	226	DR36AGB	236
5HV52BS	183	CK250	211	DR36AGP	236
5HV52BSD	179	CK300	211	DR36BBS	236
5HV52BSF	181	CT100	211	DR36BK	236
5HV52BZ	183	CT150	211	DR36BNZ	236
5HV52BZD	179	DR12AGB	236	DR36BP	236
5HV52BZF	181	DR12AGP	236	DR36BS	236
5HV52CHD	179	DR12BBS	236	DR36BZ	236
5HV52CHF	181	DR12BK	236	DR36CH	236
5HV52RZW	183	DR12BNZ	236	DR36DWZ	236
5HV52RZWD	178	DR12BP	236	DR36GRY	236
5HVDC52BS	177	DR12BS	236	DR36HAB	236
5HVDC52BSD	176	DR12BZ	236	DR36KOA	236
5HVDC52BZ	177	DR12CH	236	DR36MBK	236
5HVDC52BZD	176	DR12DWZ	236	DR36OZ	236
5HVDC52RZW	177	DR12GRY	236	DR36PN	236
5HVDC52RZWD	176	DR12HAB	236	DR36RB	236
5HVO44BK	204	DR12KOA	236	DR36RZW	236
5HVO44BZ	205	DR12MBK	236	DR36SN	236
5HVO44RZW	205	DR12OZ	236	DR36TI	236
5HVO52BK	203	DR12PN	236	DR36WGR	236
5HVO52BKD	201	DR12RB	236	DR36WH	236

	N		FΧ

DR48AGP DR48BK					000
	236	DRC72RZW	237	MC224BS-V1	222
DR48BK					
	236	DRM12AGP	237	MC224RB-V1	222
DR48BP	236	DRM12BK	237	MC224RZW-V1	222
DR48BS	236	DRM12BZ	237	MC242AGP	222
DR48BZ	236	DRM18AGP	237	MC242BS	222
DR46BZ	230	DRIMITOAGP	23/	MC242B3	222
DR48CH	236	DRM24AGP	237	MC242OZ	222
DR48DWZ	236	DRM24BK	237	MC242RB	222
DR48KOA	236	DRM24BZ	237	MC242RZW	222
DR48MBK	236	DRM36AGP	237	MC247BS	222
DD4007	227	DRM36BK	227	MC247DD	222
DR48OZ	236	DRM30BK	237	MC247RB	222
DR48PN	236	DRM36BZ	237	MC247RZW	222
DR48RB	236	DRM48AGP	237	MC260BS	220
DR48RZW	236	DRM48BK	237	MC260MBK	220
DR48SN	236	DRM48BZ	237	MC260PN	220
DR48TI	236	ESSWC-3-WH	212	MC260RZW	220
DR4011	230	E33VVC-3-VVH	212	MCZOURZVV	220
DR48WGR	236	ESSWC-4-WH	213	MC261AGP	220
DD40WII	227	ECCIMIC E MILL		NACO/ADC	220
DR48WH	236	ESSWC-5-WH	213	MC261BS	220
DR60AGP	236	ESSWC-6-WH	214	MC261OZ	220
DR60BK	236	ESSWC-7-WH	214	MC261RZW	220
DR60BP	236	ESSWC-8	215	MC262	223
DR60BS	236	ESSWC-9	215	MC263AGP	223
DD40B7	224	ESSWC-10	214	MC242DDC	223
DR60BZ	236	E33VVC-10	216	MC263BBS	223
DR60CH	236	ESSWC-11	216	MC263BS	223
DR60DWZ	236	ESWC-1	212	MC263MBK	223
DR60KOA	236	MC90AGP	228	MC263PN	223
DR60MBK	236	MC90BK	228	MC263RZW	223
DR60OZ	236	MC90BP	228	MC264AGP	221
DROUUZ	230	1*1C90BP	220	MC204AGP	221
DR60PN	236	MC90BS	228	MC264BK	221
DR60RB	236	MC90OZ	228	MC264RZW	221
DR60RZW	236	MC90PN	228	MC265AGP	221
DR60SN	236	MC90RB	228	MC265BK	221
DR60TI	236	MC90TI	228	MC265BS	221
DR60WGR	236	MC90WH	228	MC265RZW	221
DB/OWILL		MCONACD		MC2//BI/	221
DR60WH	236	MC93AGB	229	MC266BK	221
DR72AGP	236	MC93AGP	229	MC266OZ	221
DR72BK	236	MC93BBS	229	MC266RB	221
DR72BP	236	MC93BK	229	MC266RZW	221
				11C200KZ VV	
DR72BS	236	MC93BNZ	229	MC360AGP	227
DD72D7	227	MC93BP	220	MC3/ODI/	227
DR72BZ	236	MC43BP	229	MC360BK	227
DR72CH	236	MC93BS	229	MC360BS	227
DR72DWZ	236	MC93BZ	229	MC360RB	227
DR72KOA	236	MC93CH	220	MC2/OD7M	227
	230				
D D 7 0 1 4 D 1 /			229	MC360RZW	
DR72MBK	236	MC93DWZ	229	MC362AGP	227
		MC93DWZ	229	MC362AGP	227
DR72MBK DR72OZ	236 236				
DR72OZ	236	MC93DWZ MC93KOA	229 229	MC362AGP MC362BS	227 227
DR72OZ DR72PN	236 236	MC93DWZ MC93KOA MC93MBK	229 229 229	MC362AGP MC362BS MC362MBK	227 227 227
DR72OZ	236	MC93DWZ MC93KOA	229 229	MC362AGP MC362BS	227 227
DR72OZ DR72PN DR72RB	236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ	229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW	227 227 227 227
DR72OZ DR72PN DR72RB DR72RZW	236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN	229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP	227 227 227 227 227
DR72OZ DR72PN DR72RB	236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ	229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW	227 227 227 227
DR72OZ DR72PN DR72RB DR72RZW DR72SN	236 236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB	229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS	227 227 227 227 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR	236 236 236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW	229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK	227 227 227 227 224 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN	236 236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB	229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS	227 227 227 227 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH	236 236 236 236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN	229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS	227 227 227 227 224 224 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR	236 236 236 236 236 236	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW	229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK	227 227 227 227 224 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH	236 236 236 236 236 236 236 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN	229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS	227 227 227 227 224 224 224 224 224 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI	236 236 236 236 236 236 236 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFK-BS MCFKLED-AGP MCFKLED-BBS	227 227 227 227 224 224 224 224 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI	236 236 236 236 236 236 236 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH	229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFK-BS	227 227 227 227 224 224 224 224 224 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI	236 236 236 236 236 236 236 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BK MCFKLED-BK	227 227 227 227 224 224 224 224 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI	236 236 236 236 236 236 236 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BK MCFKLED-BS	227 227 227 227 224 224 224 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI	236 236 236 236 236 236 236 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BK MCFKLED-BK	227 227 227 227 224 224 224 224 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI	236 236 236 236 236 236 236 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BK MCFKLED-BK MCFKLED-BS MCFKLED-BS MCFKLED-PN	227 227 227 227 224 224 224 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI	236 236 236 236 236 236 236 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BK MCFKLED-BS	227 227 227 227 224 224 224 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI	236 236 236 236 236 236 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BK MCFKLED-BK MCFKLED-BS MCFKLED-BS MCFKLED-PN	227 227 227 227 224 224 224 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI	236 236 236 236 236 236 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BP	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BK MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFKLED-RZW	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI	236 236 236 236 236 236 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BNZ	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BK MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW	227 227 227 227 224 224 224 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI	236 236 236 236 236 236 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BNZ MC95BP MC95BS	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW	227 227 227 224 224 224 225 225 225 225 225 225 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI DRA72ATI DRA72ATI	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BNZ MC95BP MC95BS MC95BS MC95BS MC95BS	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP	227 227 227 224 224 224 225 225 225 225 225 225 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI	236 236 236 236 236 236 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BNZ MC95BP MC95BS	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW	227 227 227 224 224 224 225 225 225 225 225 225 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BNZ MC95BP MC95BS MC95BZ MC95BZ MC95CH	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM362BS	227 227 227 227 224 224 224 225 225 225 225 225 225 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BNZ MC95BP MC95BS MC95BS MC95BZ MC95CH MC95GRY	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BK MCFKLED-BK MCFKLED-BX MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BK MC95BNZ MC95BP MC95BS MC95BZ MC95BZ MC95CH	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM362BS	227 227 227 227 224 224 224 225 225 225 225 225 225 224 224
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC24MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BNZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95KOA	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA60ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BNZ MC95BP MC95BS MC95BS MC95BZ MC95CH MC95GRY	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BK MCFKLED-BK MCFKLED-BX MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA72ATI DRA72ATI DRA72ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC18RZW DRC24MBK DRC24MBK DRC24RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BNZ MC95BNZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95CA	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360AGP	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC24MBK DRC24MBK DRC24RZW DRC36MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BBZ MC95BBZ MC95BZ MC95GRY MC95KOA MC95OZ MC95PN	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA36ATI DRA48ATI DRA72ATI DRA72ATI DRA72ATI DRA72ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC18RZW DRC24MBK DRC24MBK DRC24RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BNZ MC95BNZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95CA	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360AGP	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC24MBK DRC24MBK DRC24RZW DRC36MBK DRC36MBK DRC36RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BBZ MC95BP MC95BZ MC95CH MC95GRY MC95KOA MC95OZ MC95PN MC95RB	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BBS MCFKLED-BS MCFKLED-BY MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC1T	227 227 227 224 224 224 225 225 225 225 225 225 227 227 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC24MBK DRC24MBK DRC24RZW DRC36MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BBZ MC95BBZ MC95BZ MC95GRY MC95KOA MC95OZ MC95PN	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1	227 227 227 227 224 224 224 225 225 225 225 225 225 225
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC24MBK DRC24MBK DRC24RZW DRC36MBK DRC36MBK DRC36RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95CH MC95GRY MC95DZ MC95PN MC95RB MC95RB	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC1T MCRC3	227 227 227 224 224 224 225 225 225 225 225 225 227 220 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC36MBK DRC24RZW DRC36MBK DRC36RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BRZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95GRY MC95CA MC95OZ MC95PN MC95RB MC95RZW MC95RZW MC95SN	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC3 MCRC3W	227 227 227 224 224 224 225 225 225 225 225 225 227 210 210 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC36MBK DRC24RZW DRC36MBK DRC36RZW DRC36MBK DRC36RZW DRC48MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95CH MC95GRY MC95DZ MC95PN MC95RB MC95RB	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC1T MCRC3	227 227 227 224 224 224 225 225 225 225 225 225 227 220 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC36MBK DRC24RZW DRC36MBK DRC36RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC60MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BP MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95GRY MC95CA MC95OZ MC95PN MC95RB MC95RZW MC95RZW MC95SN MC95SN	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC3 MCRC3W	227 227 227 224 224 224 225 225 225 225 225 225 227 210 210 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC36MBK DRC24RZW DRC36MBK DRC36RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC60MBK DRC60MBK DRC60MBK DRC60RZW	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBZ MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95GRY MC95CH MC95GRY MC95RB	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC3 MCRC3W	227 227 227 224 224 224 225 225 225 225 225 225 227 210 210 210 210
DR72OZ DR72PN DR72RB DR72RZW DR72SN DR72WGR DR72WH DRA12ATI DRA18ATI DRA24ATI DRA48ATI DRA60ATI DRA72ATI DRC12MBK DRC12RZW DRC18MBK DRC18RZW DRC36MBK DRC24RZW DRC36MBK DRC36RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC48MBK DRC48RZW DRC60MBK	236 236 236 236 236 236 237 237 237 237 237 237 237 237 237 237	MC93DWZ MC93KOA MC93MBK MC93OZ MC93PN MC93RB MC93RZW MC93SN MC93WH MC95AGB MC95AGP MC95BBS MC95BBS MC95BBS MC95BP MC95BP MC95BS MC95BZ MC95CH MC95GRY MC95GRY MC95CA MC95OZ MC95PN MC95RB MC95RZW MC95RZW MC95SN MC95SN	229 229 229 229 229 229 229 229 229 229	MC362AGP MC362BS MC362MBK MC362RZW MCFK-AGP MCFK-BBS MCFK-BK MCFK-BS MCFKLED-AGP MCFKLED-BS MCFKLED-BS MCFKLED-BS MCFKLED-PN MCFKLED-RZW MCFK-PN MCFK-RZW MCM95AGP MCM95BS MCM360AGP MCM360BK MCRC1 MCRC3 MCRC3W	227 227 227 224 224 224 225 225 225 225 225 225 227 210 210 210 210

Adler 60	64	Haven Outdoor 52	202
Akova 56	96	Haven Outdoor 44	204
Alba 60	48	Hicks 60	130
Arcade 68	98	Ikon 52	154
Arcade 54	100	Ikon 44	156
Arezzo 60	164	Jovie 58 LED	72
Armstrong 60	66	Jovie 58	74
Aspen 70	126	Jovie 52 LED	76
Aspen 56	128	Jovie 52	78
Atlantic 56	92	Jovie 44 LED	80
Avila 54	108	Jovie 44	82
Avila Coastal 54	190	Kingston 72	102
Avvo 56	90	Launceton 56	138
Boynton 54	196	Lily 56	114
Bryden 60 Smart	132	Loft 96	42
Butterfly 54	116	Loft 72	44
Centro 44	146	Loft 62	46
Cirque 56	62	Lowden 52	106
Clarity 56	38	Lowden 60 Smart	104
Clarity 52	60	Maverick Coastal 60	186
Clarity 42	61	Maverick 88	20
Collins Coastal 60 Smart	188	Maverick 70 LED	22
Collins Smart 60	34	Maverick 70	24
Colony 60 LED	166	Maverick 60 LED	26
Colony 60	168	Maverick 60	28
Colony 52 LED	170	Maverick 52 LED	30
Colony 52	172	Maverick 52	32
Cruise 52	198	Metrograph 56	140
Cyclone 60	192	Minimalist 72	36
Destin 57	94	Minimalist 56	38
Discus 52 Smart	148	Prairie 72	120
Discus Classic 52	150	Prairie 62	122
Discus Classic 44	152	Prairie 52	124
Discus Ornate 52	174	Rozzen 52	68
Discus Outdoor 52	194	Rozzen 44	44
Dover 68	142	Ruhlmann 52 Smart	134
Dover 60	144	Stockton 60	40
Era 52	86	Streaming 60 Smart	110
Era 44	88	Streaming 52 Smart	112
Giarre 60	162	Subway 56	136
Haven 52 DC LED	176	Syrus 52	84
Haven 52 DC	177	Traverse 52	158
Haven 52 LED 3	180	Vision 72	50
Haven 52 LED 2	178	Vision 56	52
Haven 52	182	Vision 52	54
Haven Outdoor 52 LED	200	Vision 42	56

VISUAL COMFORT & CO.

7400 Linder Avenue Skokie, IL 60077

Phone: 800.519.4092 Fax: 866.490.7765

montecarlofans.com | @montecarlofanco | #montecarlofans

© 2022 Visual Comfort & Co. MC2022