


## ASSEMBLY INSTRUCTIONS

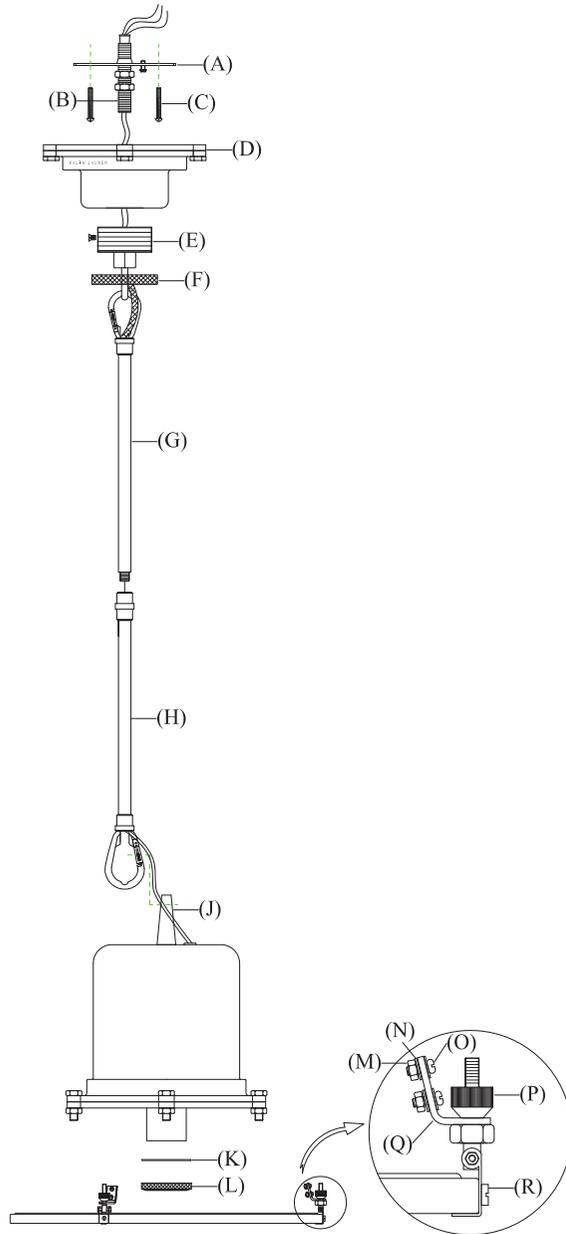

## Fulton Large Pendant

Item # RL 5122

### NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Remove socket ring (L) and washer (K.) from the socket.
2. Remove bending plates (Q) from nipple by unscrewing thumbscrews (P), and remove screws (O) from bending plate (Q) by unscrewing washers (N) and nuts (M).
3. Attach bending plate (Q) to lamp shade (not included), and letting screws (O) pass through the holes of lamp shade, and secure with washers (N), nuts (M).
4. Attach lamp shade to shade holder, and secure with washer (K) and socket ring (1).
5. Insert light bulb (not included) into socket.
6. Remove thumbscrews (P) from nipple, and attach assembly part with galss (R) into the hole of plate (Q), and tighten with thumbscrews (P).
7. Attach upper pole (G) to lower pole (H) and tightening by turning pole (G) in counter-clockwise directions.
8. Hook lamp pole (G) to mounting loop (E) and assembly part (J). (See left illustration)
9. Unscrewing the canopy ring (F) from chain mounting loop (E) and slide canopy (D) and canopy ring (F) on pole.
10. Feed wire through pole (G) canopy ring (F), canopy (D) and mounting loop (E).
11. Attach mounting strap (A) to ceiling outlet box using mounting screws (C) provided.

# RALPH LAUREN



## ASSEMBLY INSTRUCTIONS

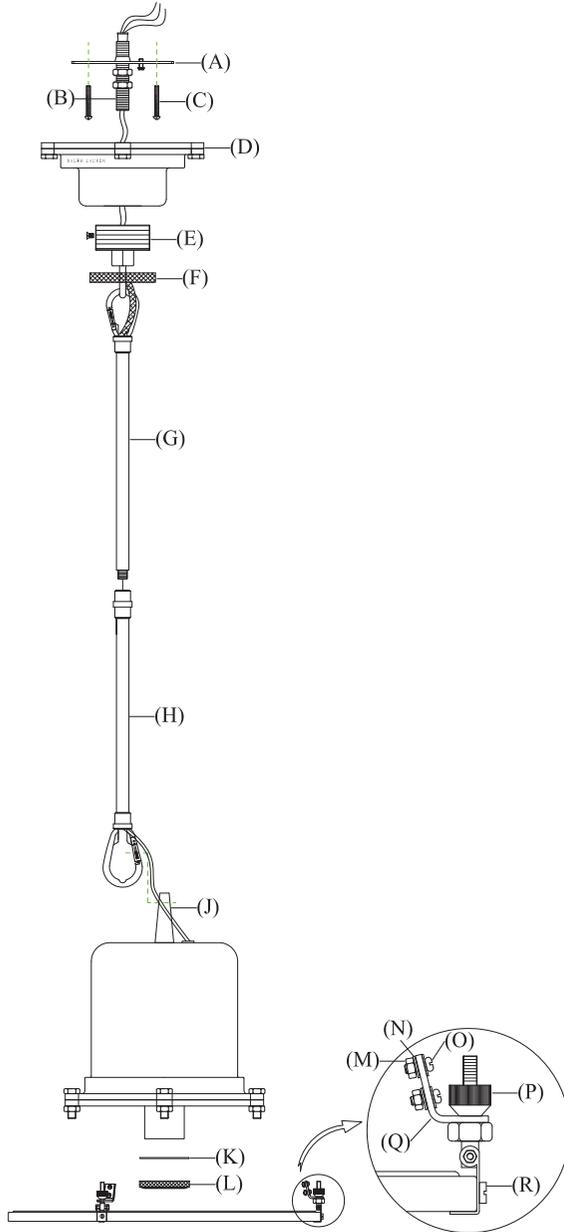

## Fulton Large Pendant

Item # RL 5122

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

12. Insert threaded nipple (B) in mounting strap (A). Using pliers, thread one of hex nut to nipple (B) to secure.
13. Attach chain mounting loop (E) to thread nipple using the ceiling loop screw.

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

# RALPH LAUREN

